

底装拉篮缓冲滑轨  
Bottom mounted soft closing wire-basket slide



基本参数 Basic Parameter

产品材质: 镀锌板  
材料厚度: 1.5x2.0x1.5 mm  
额定负重: 35KGS / 18" 标准长度  
使用寿命: 超过50000次, 通过SGS疲劳测试  
尺寸范围: 16" - 20" , 也可根据要求定制  
产品特点: 1.全新优化设计, 配备高精度的生产线和检测仪器  
2.双缓冲静音系统保证滑动导轨推拉轻松, 顺畅无噪声  
3.导轨全展拉出, 拉篮安装和拆卸快捷方便


Product material: Galvanized sheet  
Material thickness: 1.8x1.5x1.0 mm  
Load rating: 35KGS / 18" as standard  
Cycling: over 50,000 times, pass the SGS fatigue test  
Size range: 12" - 22" ,customized is available  
Product feature:1. Innovative new designed , produced by high accuracy production line and strict measuring,  
2.Smooth and stable running with new damper,silent soft closing,sfe and reliable  
3.Full extension slide,easy basket installation and removing.

产品规格 Product specifications


| 产品编号<br>Item No | 滑轨长度 ( L1 )<br>Slide Length | 拉出长度(mm)<br>Pull-out Length | 包装单位 ( 套/箱 )<br>Packing Unit ( set/box ) |
|-----------------|-----------------------------|-----------------------------|------------------------------------------|
| EUR33U2-400     | 400                         | 398                         | 10                                       |
| EUR33U2-450     | 450                         | 448                         | 10                                       |
| EUR33U2-500     | 500                         | 498                         | 10                                       |

Installation- 安装详情

基本部件  
The basic components

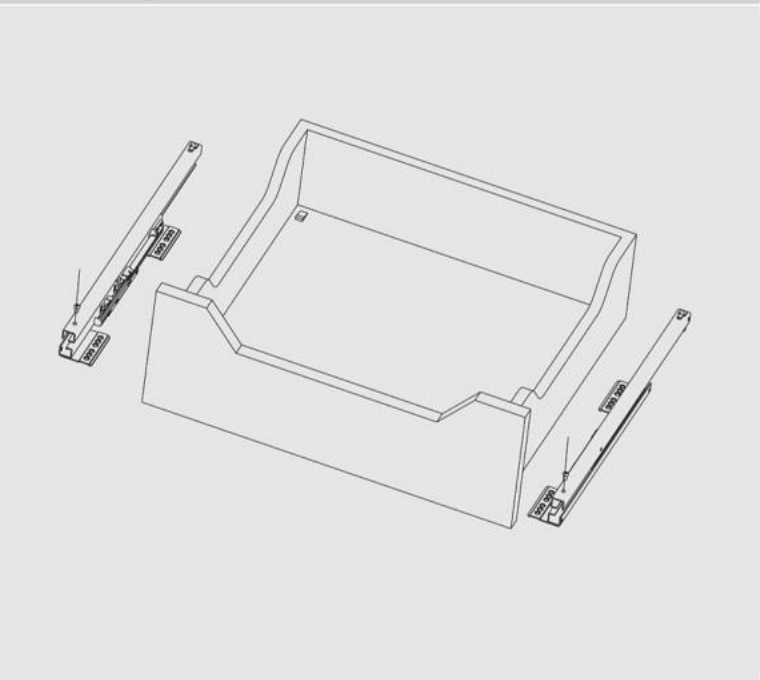

安装示意图  
Install Diagram

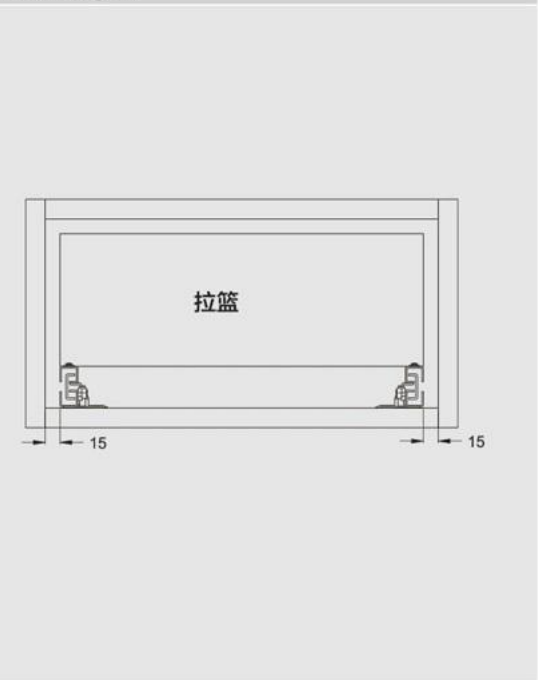

安装孔位图  
Hole Pattern For Installation

