



产品材质: 冷轧板
产品颜色: 石墨黑、白色闪银
额定负重: 30 KGS (450mm标准长度)
侧帮高度: 185mm
使用寿命: 超过50000次, 通过SGS疲劳测试
尺寸范围: 300-550mm, 也可根据要求定制
安装方式: 前置连接件锁螺丝固定
产品应用: 橱柜、衣柜、浴室柜、民用家具等

Product Material: Cold rolled steel
Product Color: Graphite , White and sliver
Load rating: 30 KGS , 450mm as standard
Wall Height: 185mm
Cycling: over 50,000 times , pass the SGS fatigue test
Size range: 300-550mm, customized is available
Installation: connect with front connector
Application: Kitchen cabinet, wardrobe,bathroom cabinet , civil furniture,etc..


侧邦订购信息 (Metal Wall Order Information):

NI标准长度 Nominal Length	白色闪银 White with sliver	石墨黑 Graphite	包装单位 (套/箱) Packing Unit (set/box)
300mm	M02185-300W	M02185-300W	10
350mm	M02185-350W	M02185-350W	10
400mm	M02185-400W	M02185-400W	10
450mm	M02185-450W	M02185-450W	10
500mm	M02185-500W	M02185-500W	10
550mm	M02185-550W	M02185-550W	10

滑轨订购信息 (Slide Order Information):

产品编号 Item No	抽屉长度 Drawer Length	最小柜深 Min Cabinet Depth	包装单位 (套/箱) Packing Unit (set/box)
EUR33B-12"/300	300mm	322mm	10
EUR33B-14"/350	350mm	372mm	10
EUR33B-16"/400	400mm	422mm	10
EUR33B-18"/450	450mm	472mm	10
EUR33B-20"/500	500mm	522mm	10
EUR33B-22"/550	550mm	572mm	10

M02185超薄阻尼抽屉系列安装说明
SLIM DRAWER BOX SOFT CLOSING SYSTEM INSTALLATION

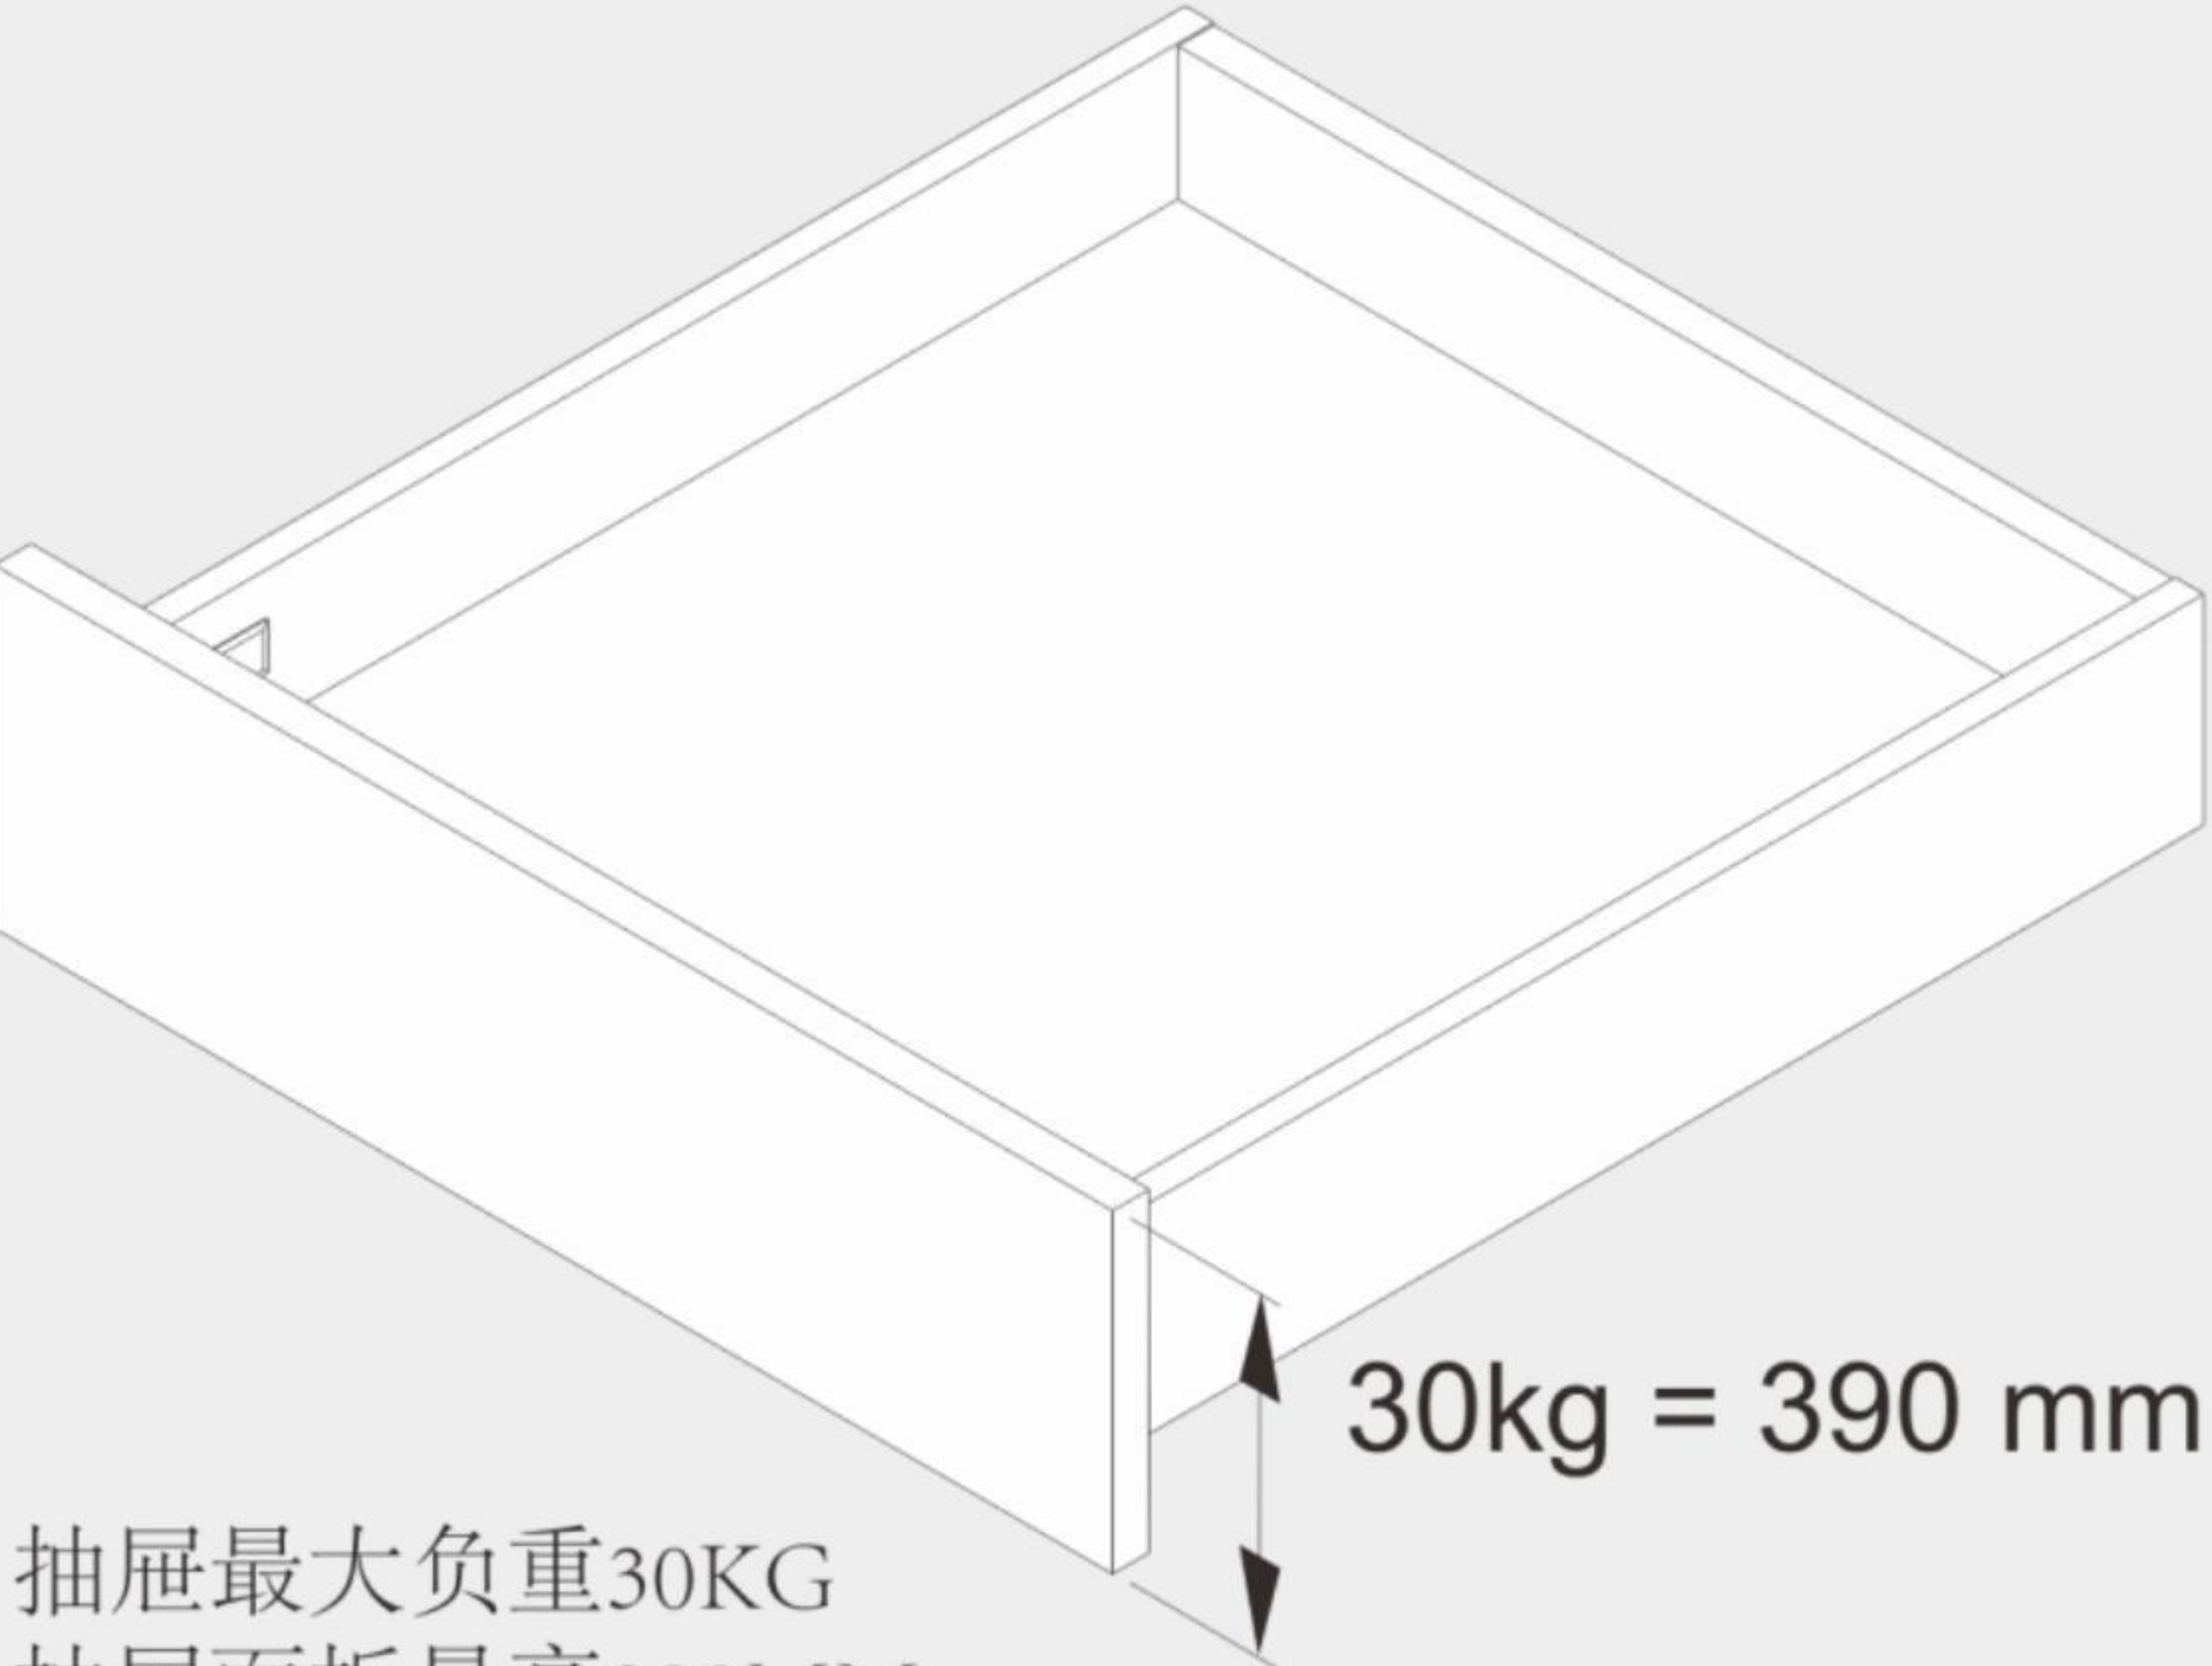


30kg = 390 mm max.


抽屉最大负重30KG
抽屉面板最高390MM

the drawer load capacity 30kgs
drawer door height 390mm is maxheight


1

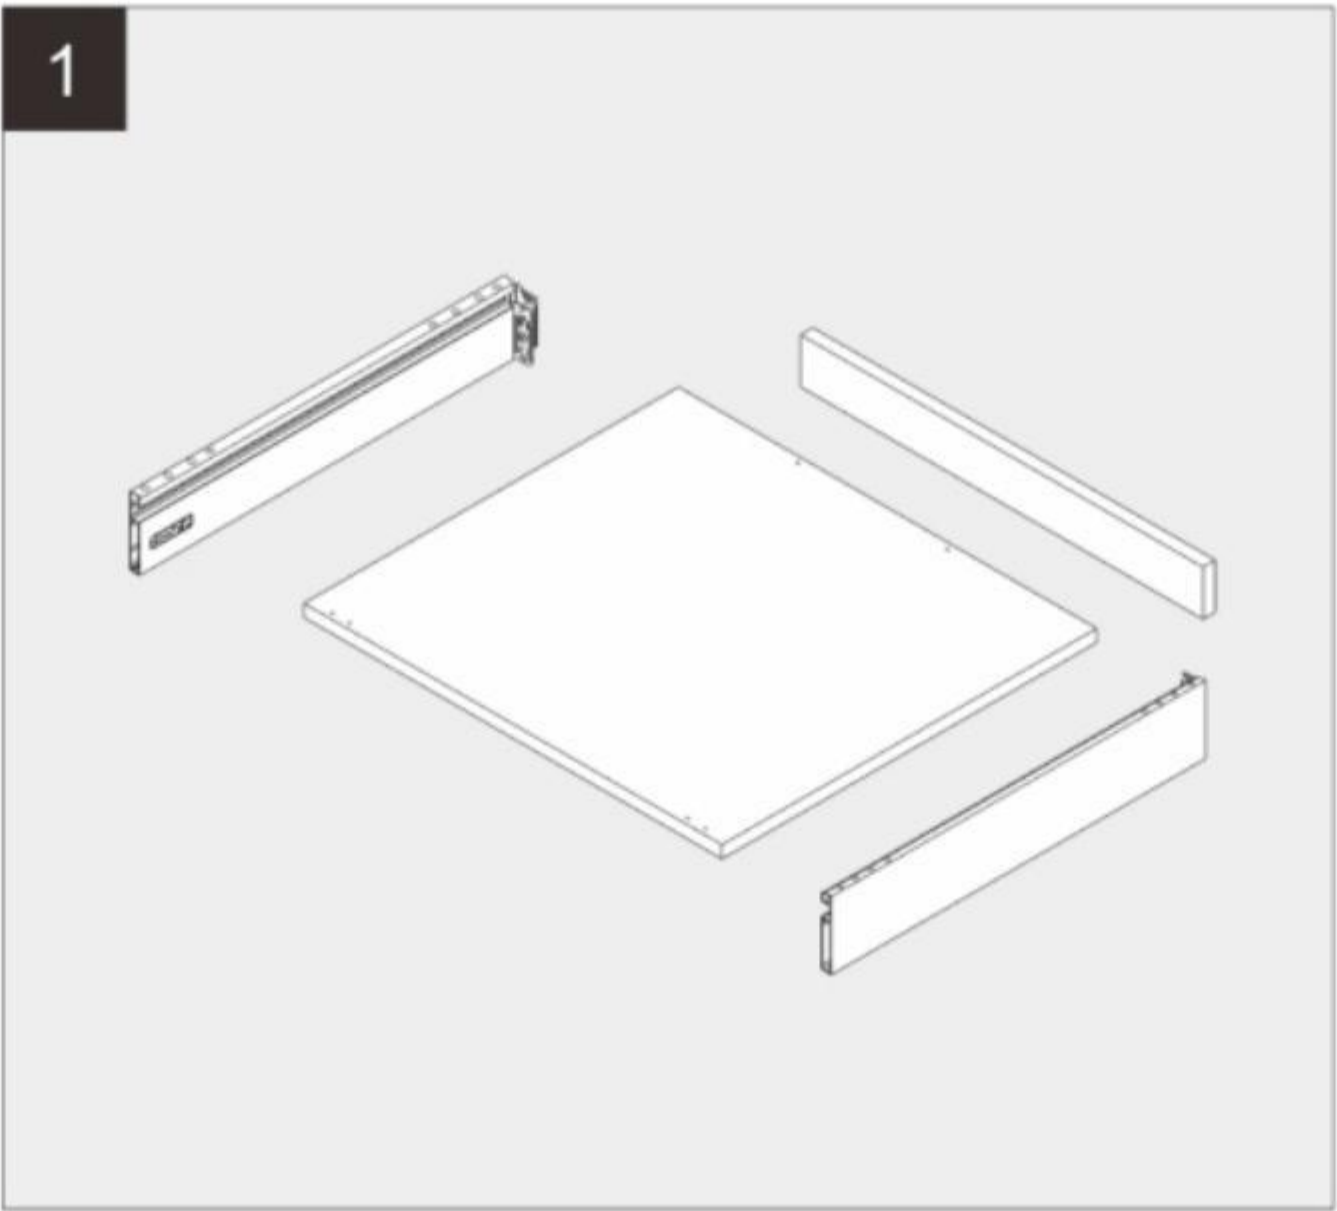


2

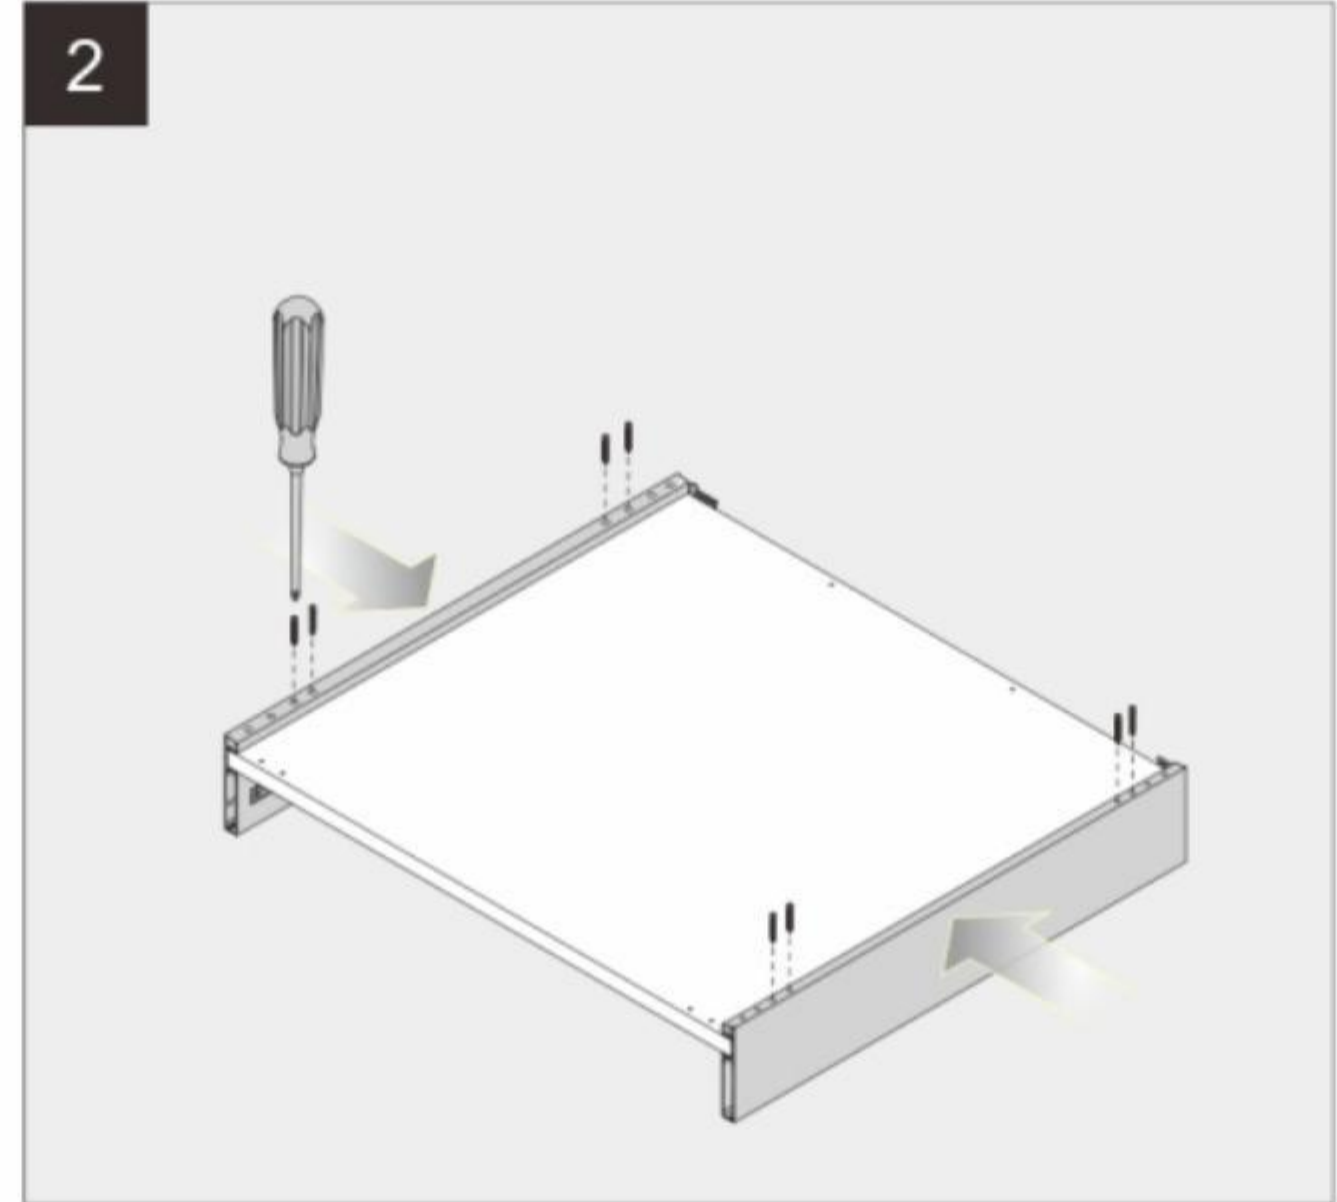


3

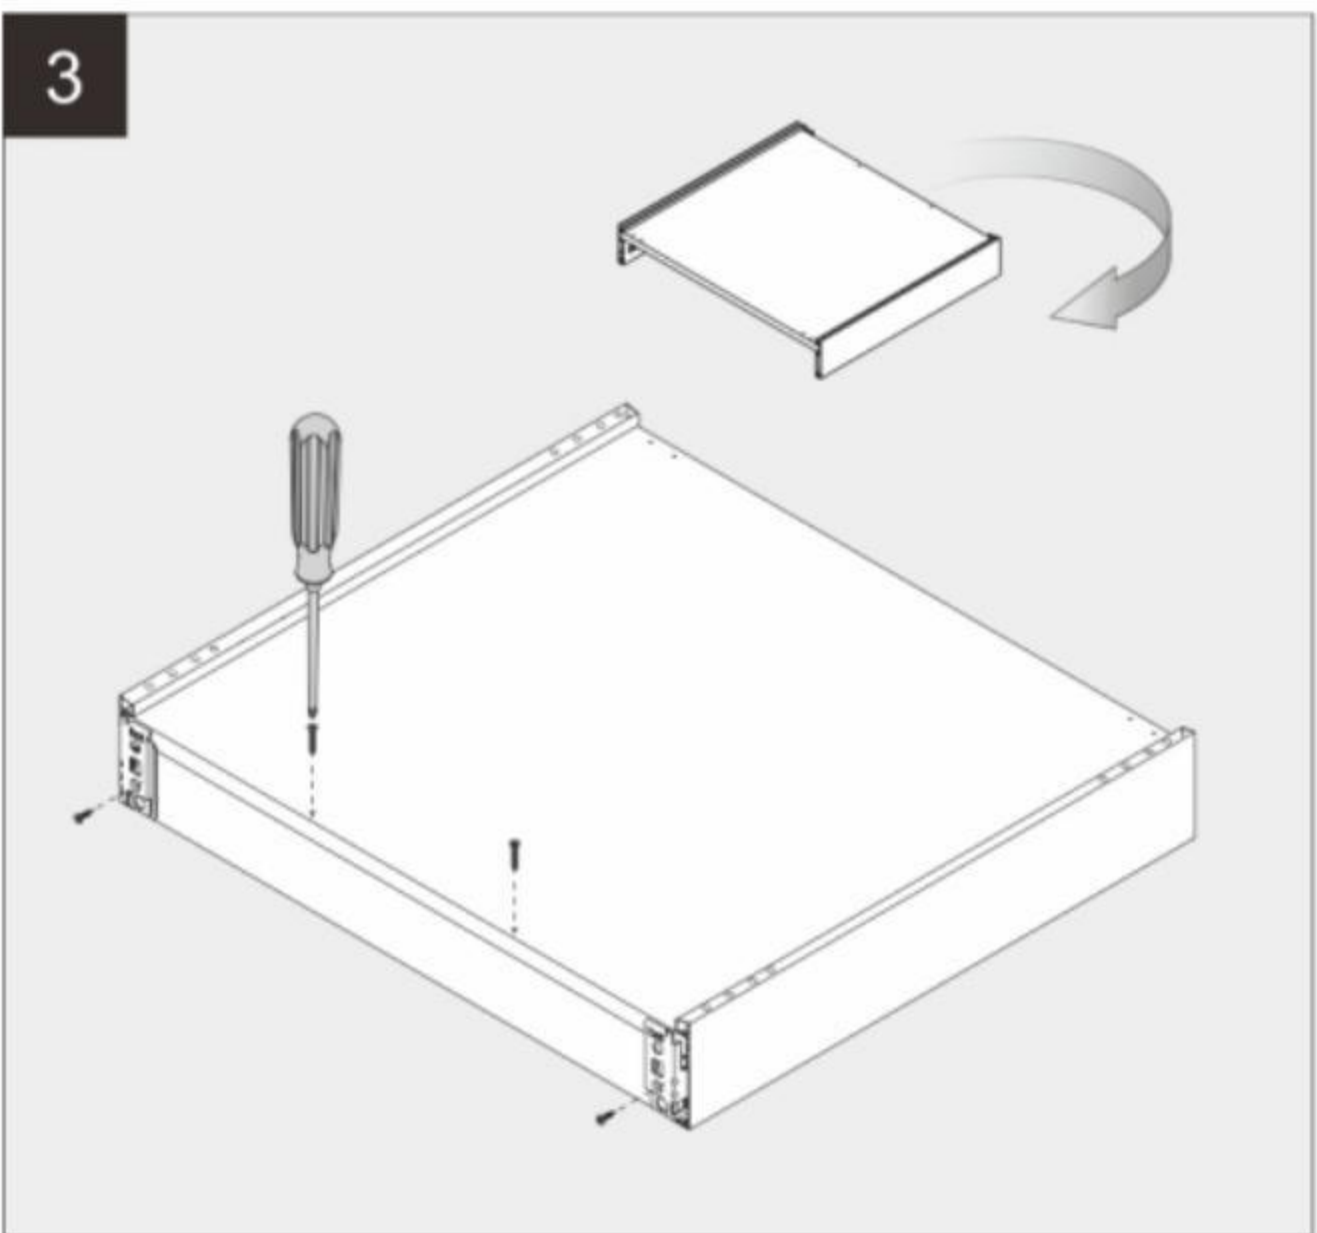


4

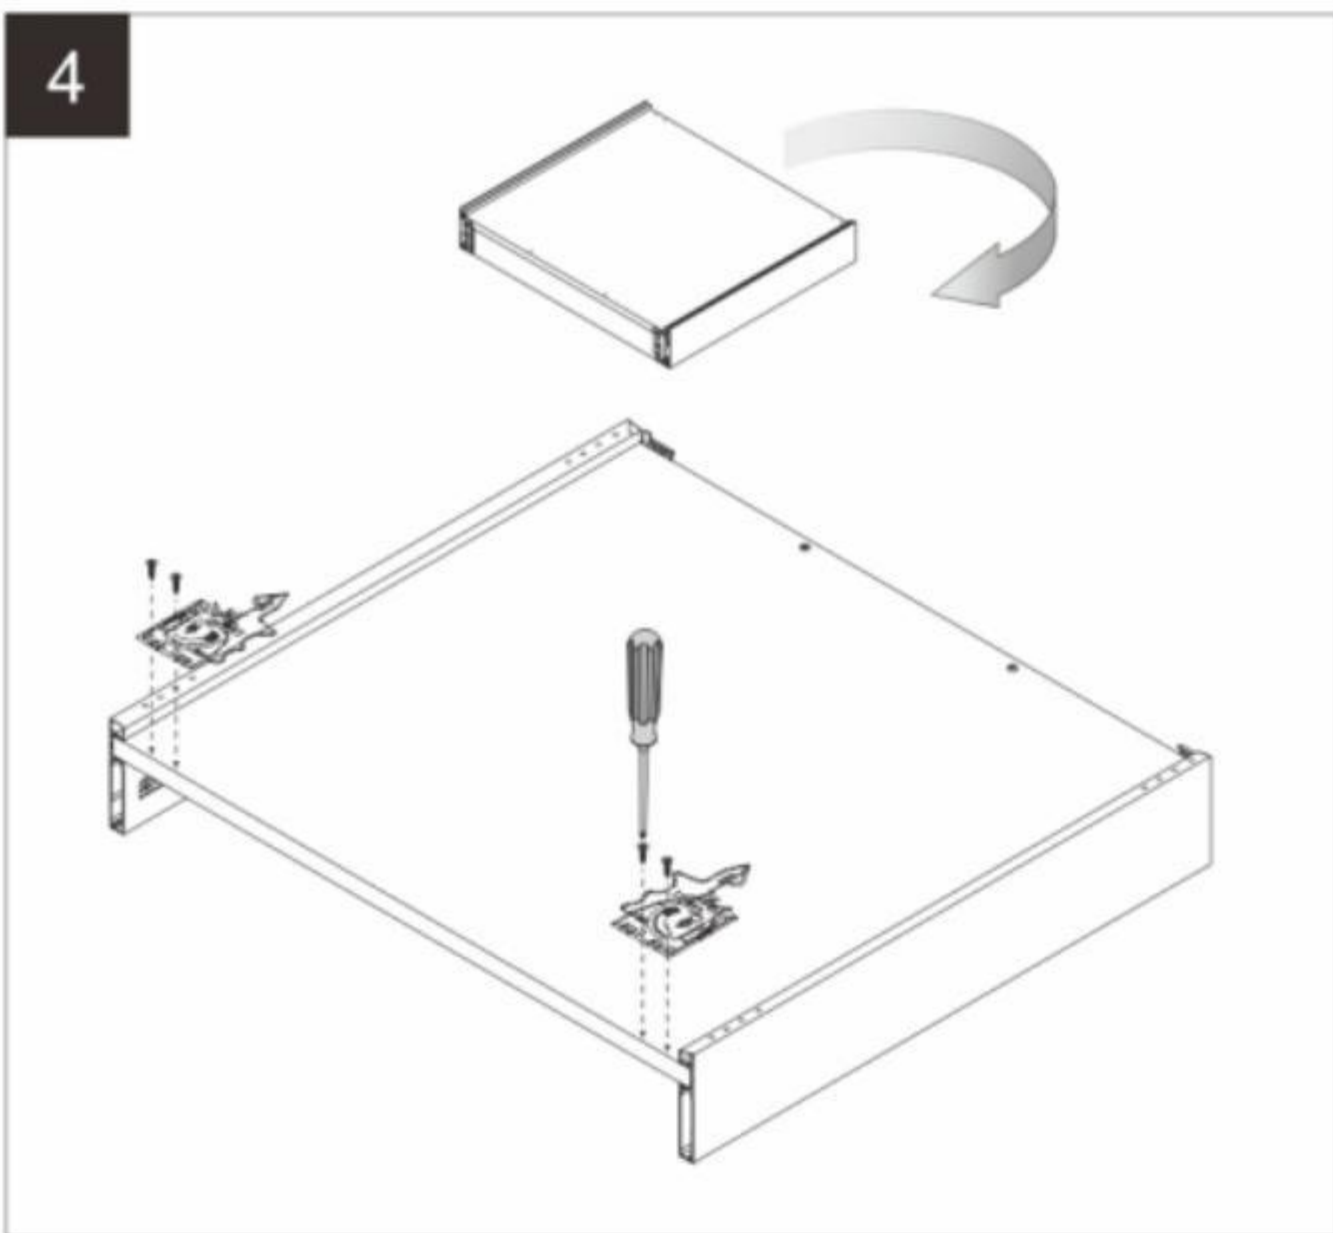


5

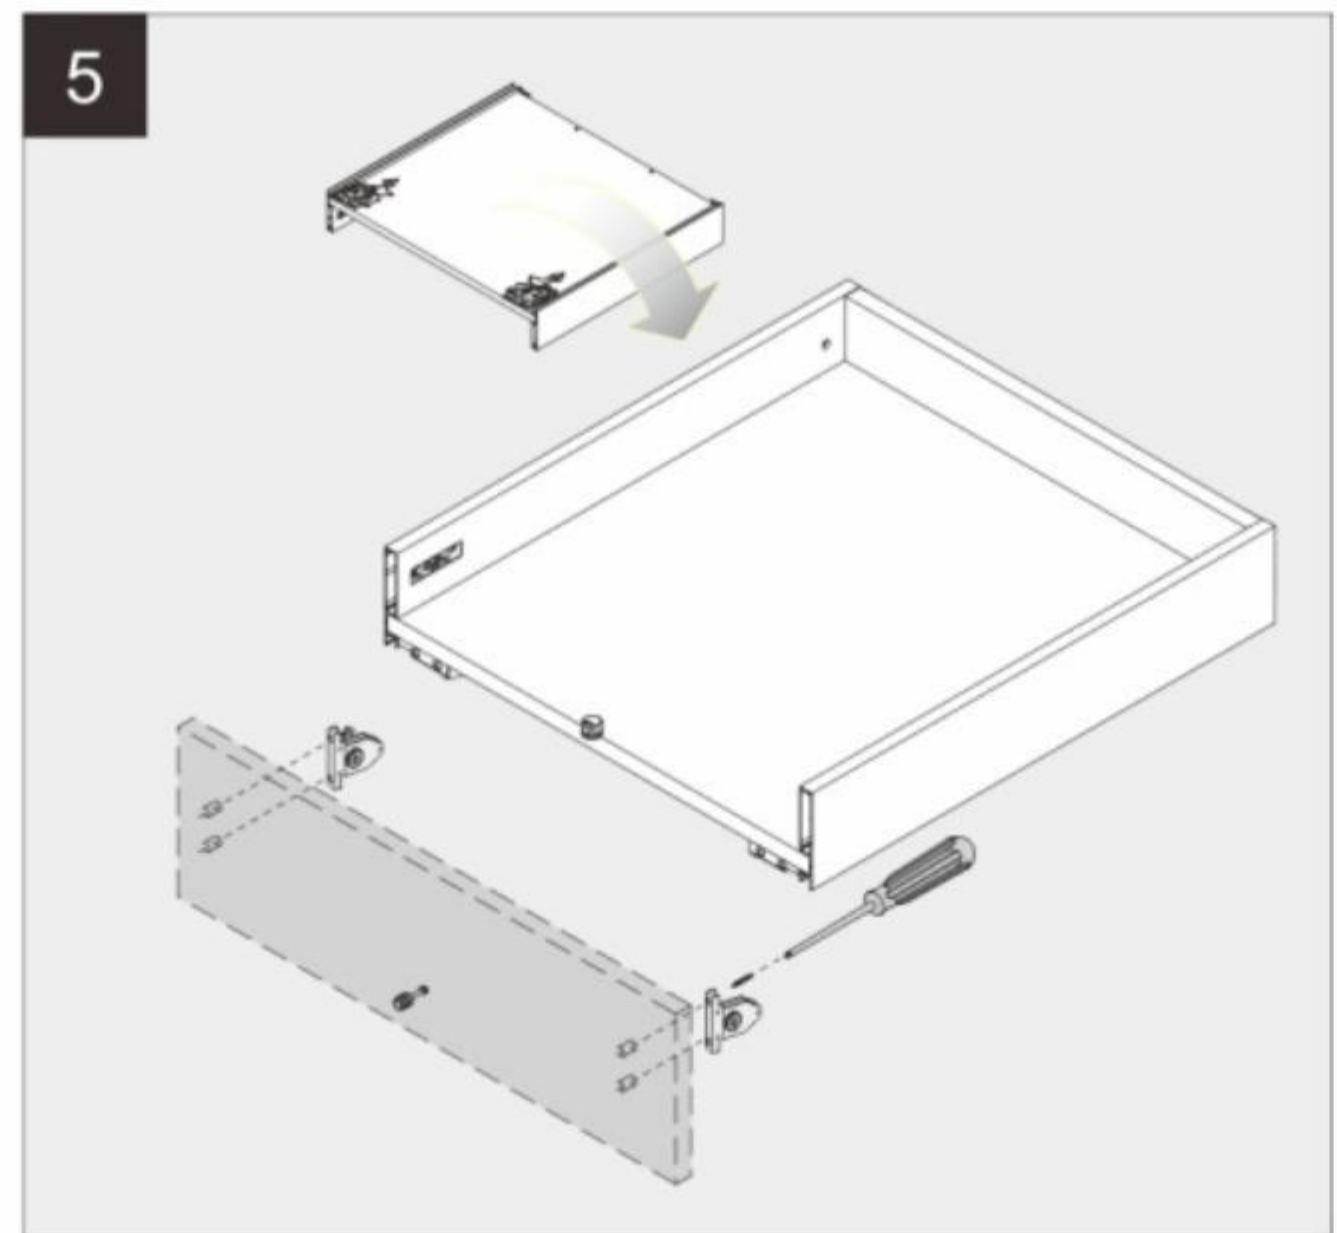


6

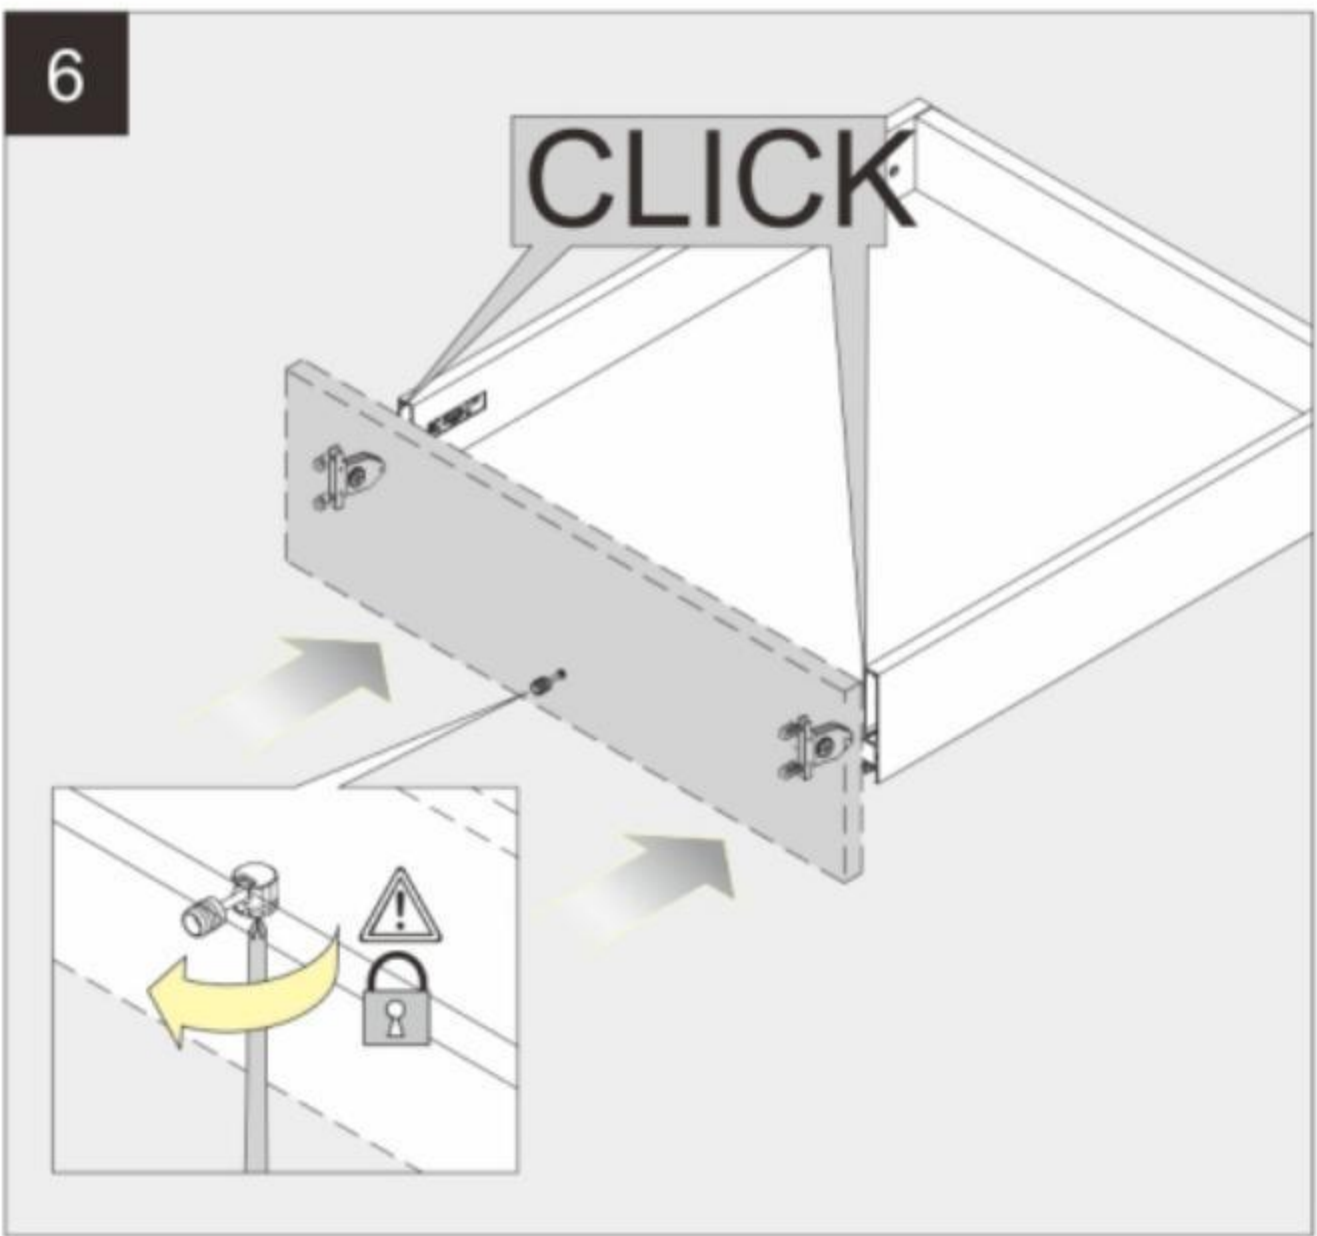

7



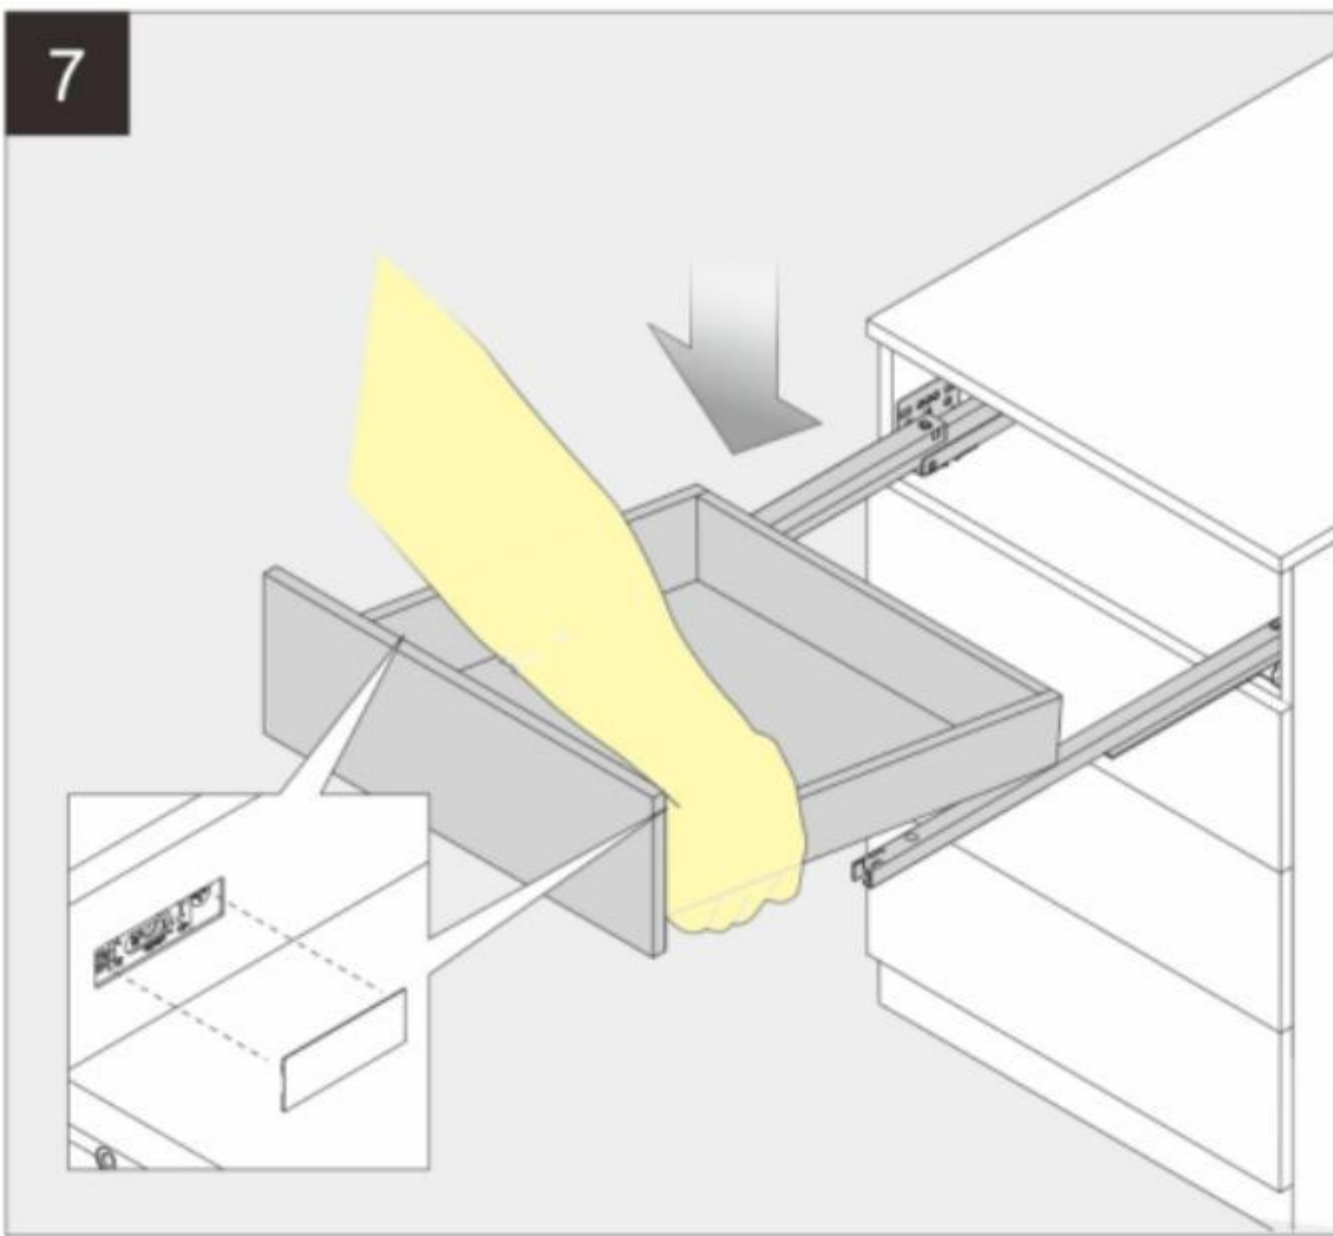


8

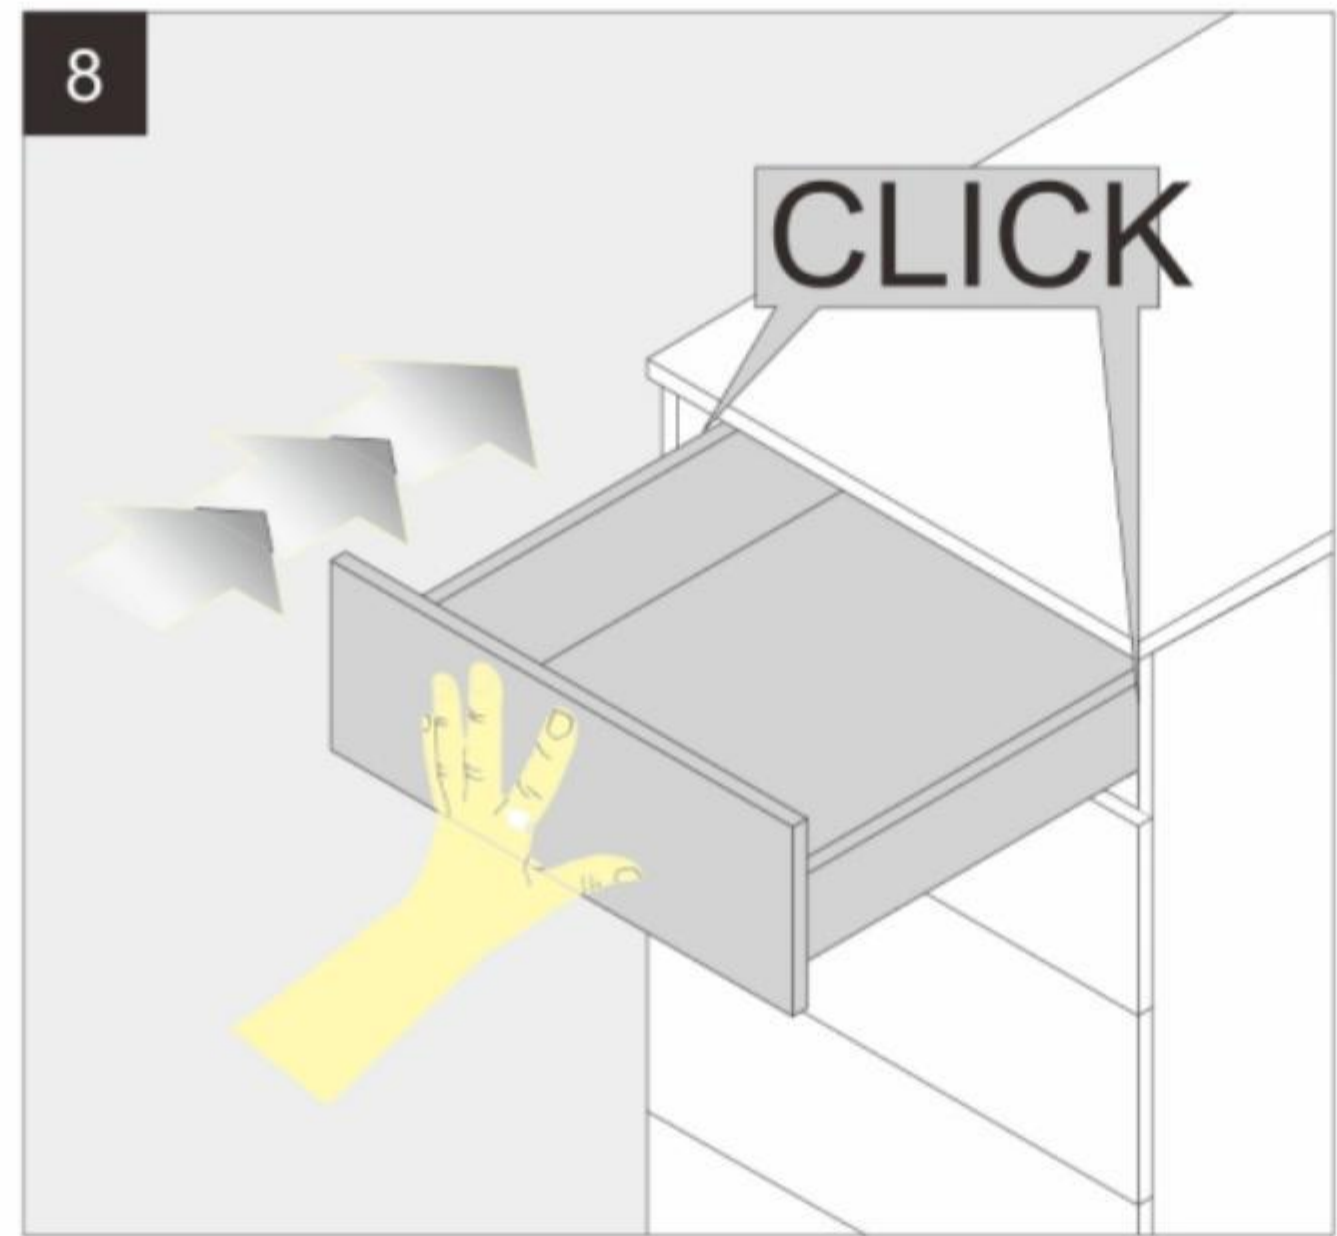

M02185超薄阻尼抽屉系列尺寸安排
SLIM DRAWER BOX SOFT CLOSING SYSTEM PLANNING DIMENSIONS

所有尺寸都是毫米为单位 All dimensions in millimetres

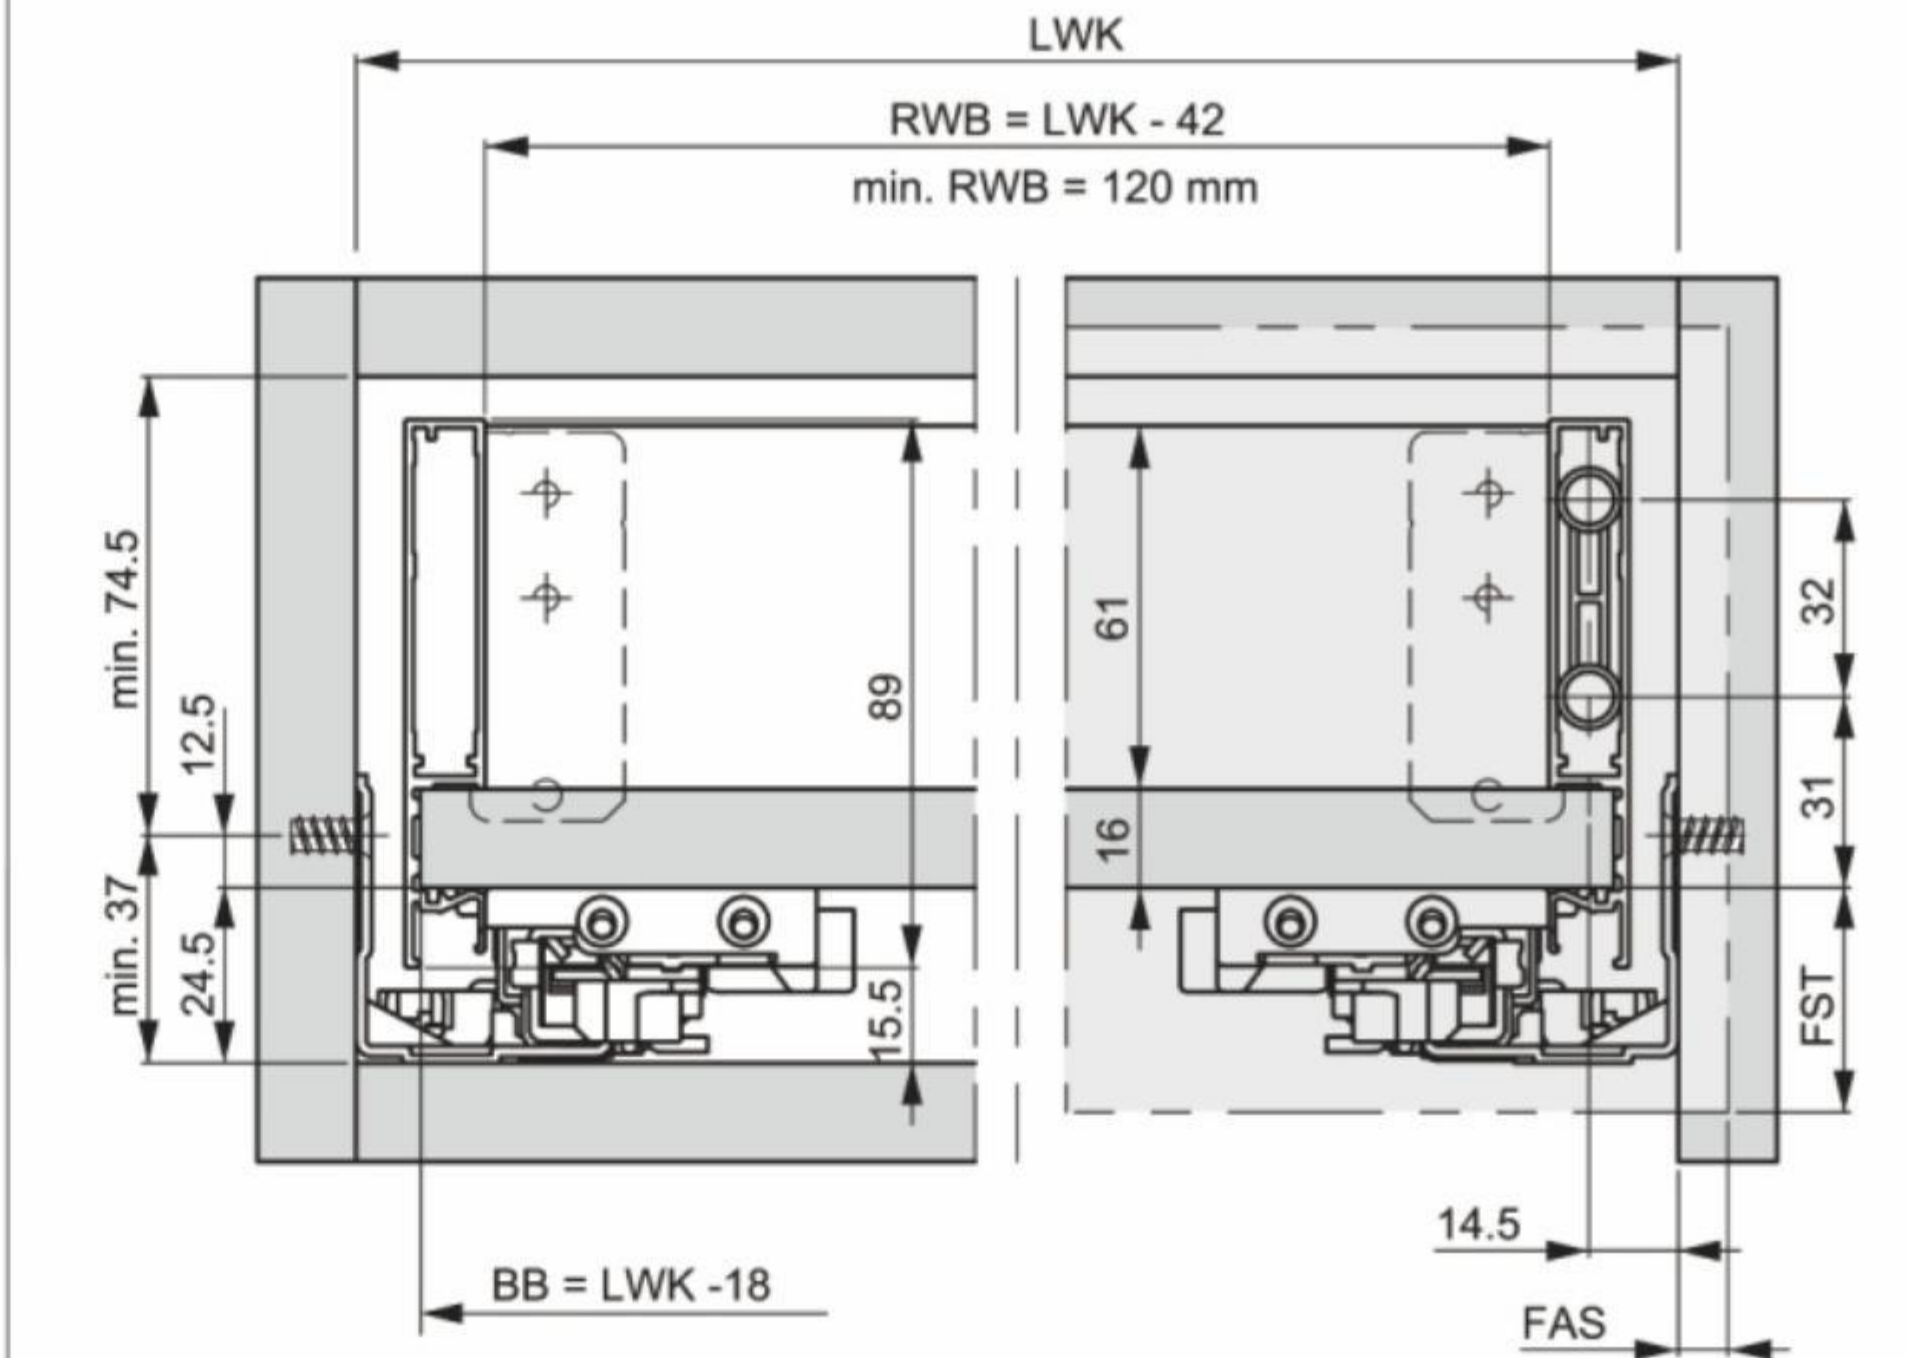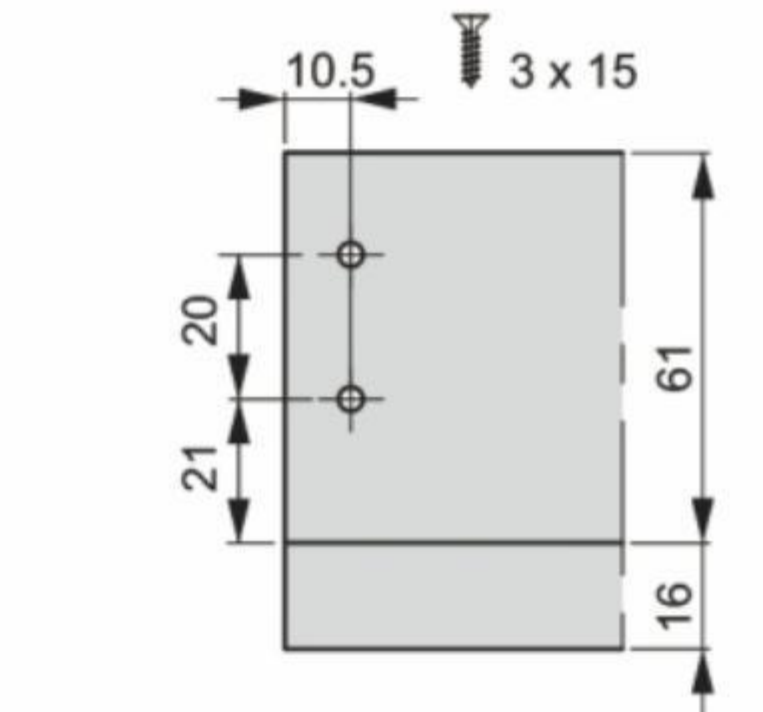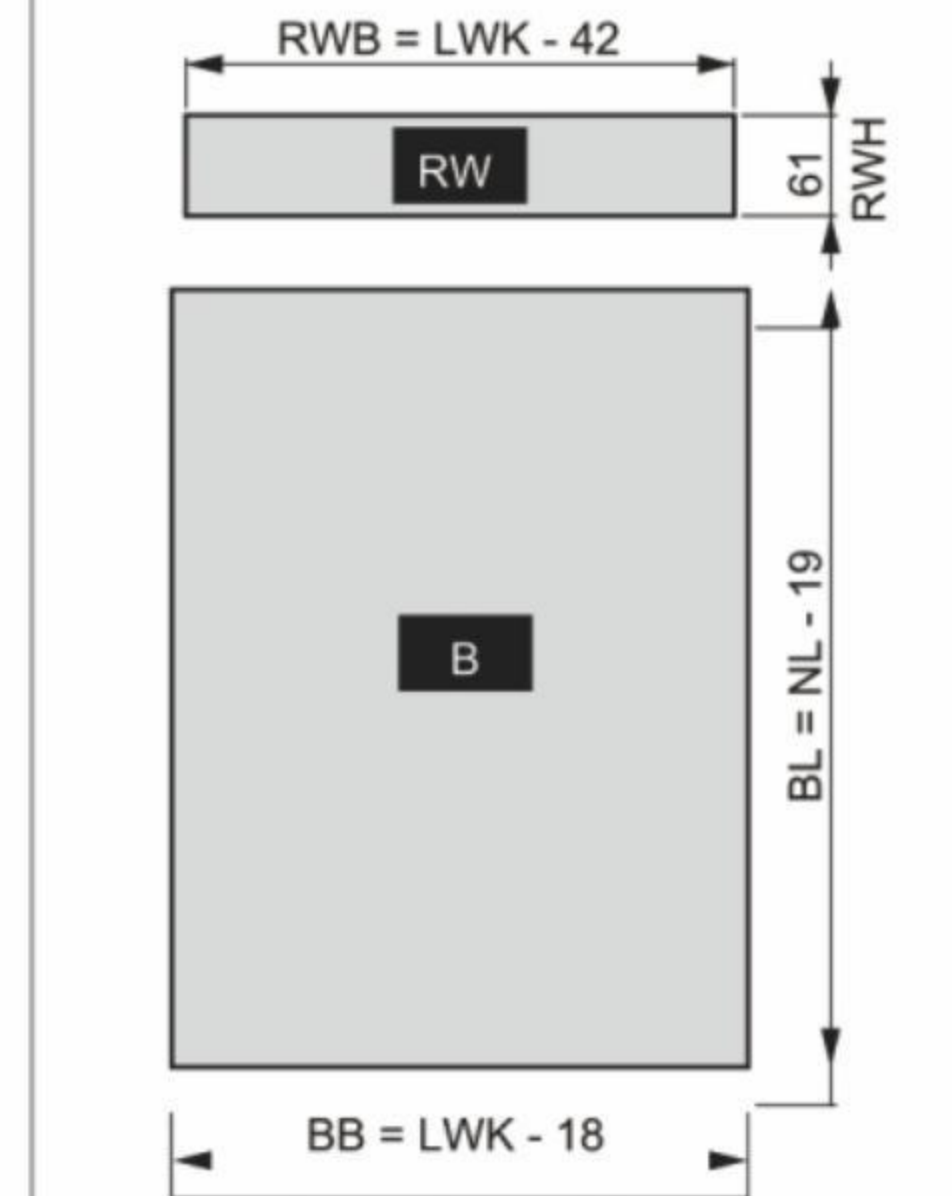前面板安装尺寸 Front panel installation dimensions	后背板安装尺寸 Back panel installation dimensions	16mm板厚裁板尺寸 Cutting dimensions for 16 mm board
		
背板螺丝链接侧板 Screw connection, back panel (KAB ≥ 275)		背板和底板与侧板通过螺丝链接 Screw connection, back panel (KAB ≥ 600)

LEGEND

B	抽屉底板 Bottom panel	FST	前面板盖滑轨底部盖尺寸 Front overlay	NL	产品标称长度 Nominal length
BB	抽屉底板宽度 Bottom panel width	KV	柜体前边缘 Front edge of cabinet	RW	抽屉背板 RW Back panel
BL	抽屉底板长度 Bottom panel length	LWK	柜体内空宽度 Inside cabinet width	RWB	抽屉背板宽度 RWB Width of back panel
FAS	前面板盖柜体侧板尺寸 Front overlay, side	MET	最小安装深度 Minimum installation depth	RWH	抽屉背板高度 RWH Height of back panel


所有尺寸都是毫米为单位 All dimensions in millimetres. Subject to changes.

隐藏式滑轨的安装尺寸
the undermount slide installation hole system


Cabinet edge




(1) 请将滑轨按照滑轨安装孔位图的孔位安装螺丝，螺丝锁紧滑轨在柜体上，然后将滑轨拉出至全展状态
Please install the drawer and slide well, and keep the slide full extension outside the drawer.

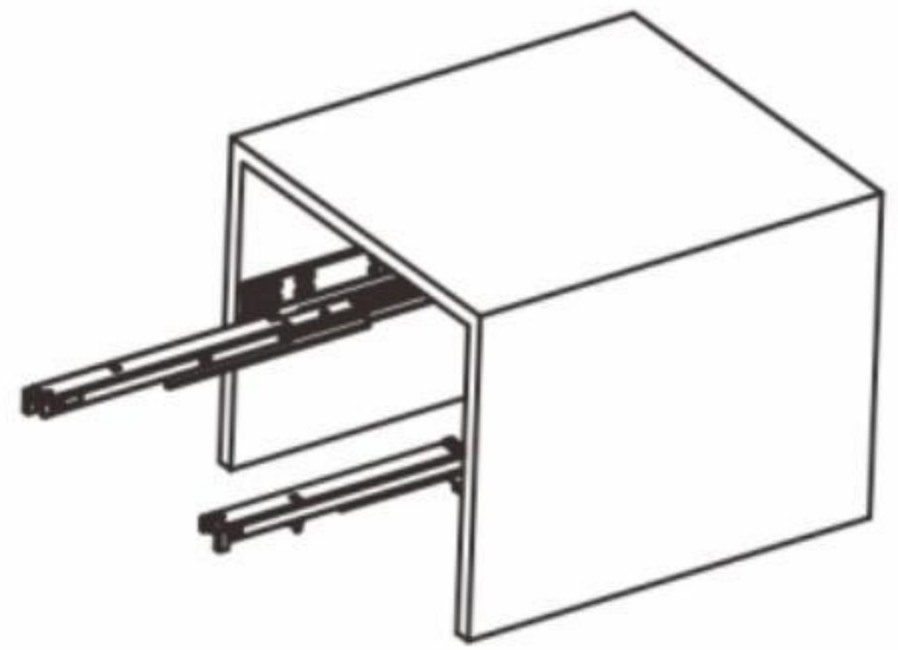


(2) 请将把手用螺丝锁紧安装在抽屉底板左右两侧
The connecting link be installed on the bottom of the drawer.

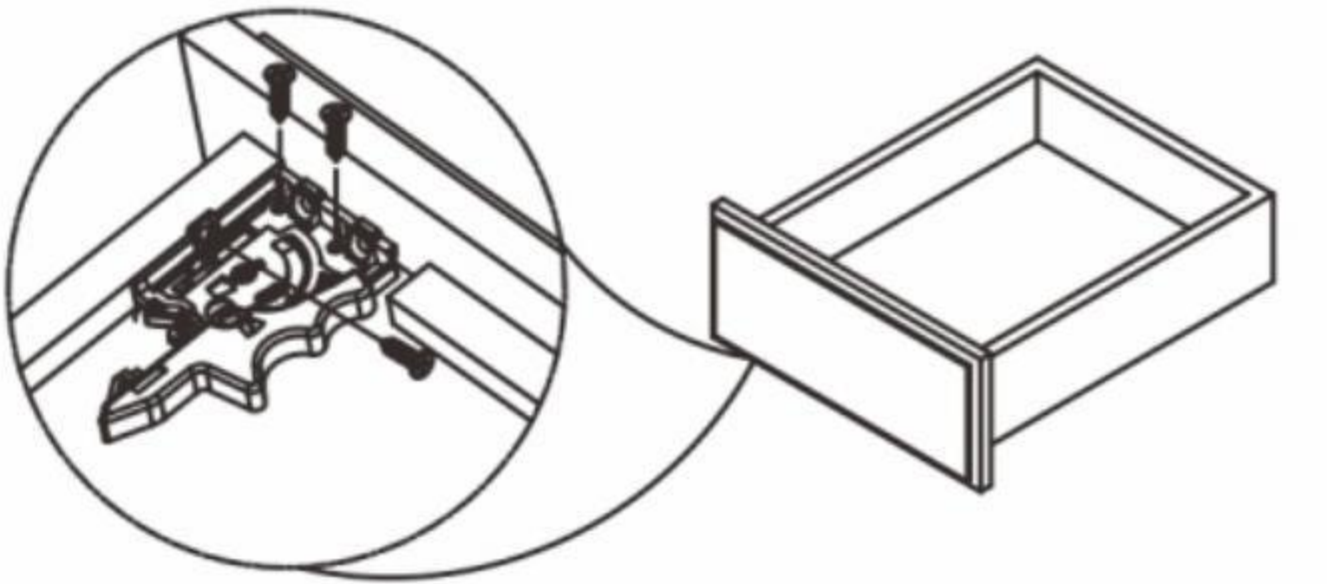


(3) 请将装好把手的抽屉平放到装好滑轨的柜体，然后将抽屉沿着滑轨往里推到底，听见“喀哒”声音说明把手和抽屉连接良好。
Please put the drawer flat on the slide, and close the drawer completely. When the slide be connected with the connecting link, then the installation to be finished.

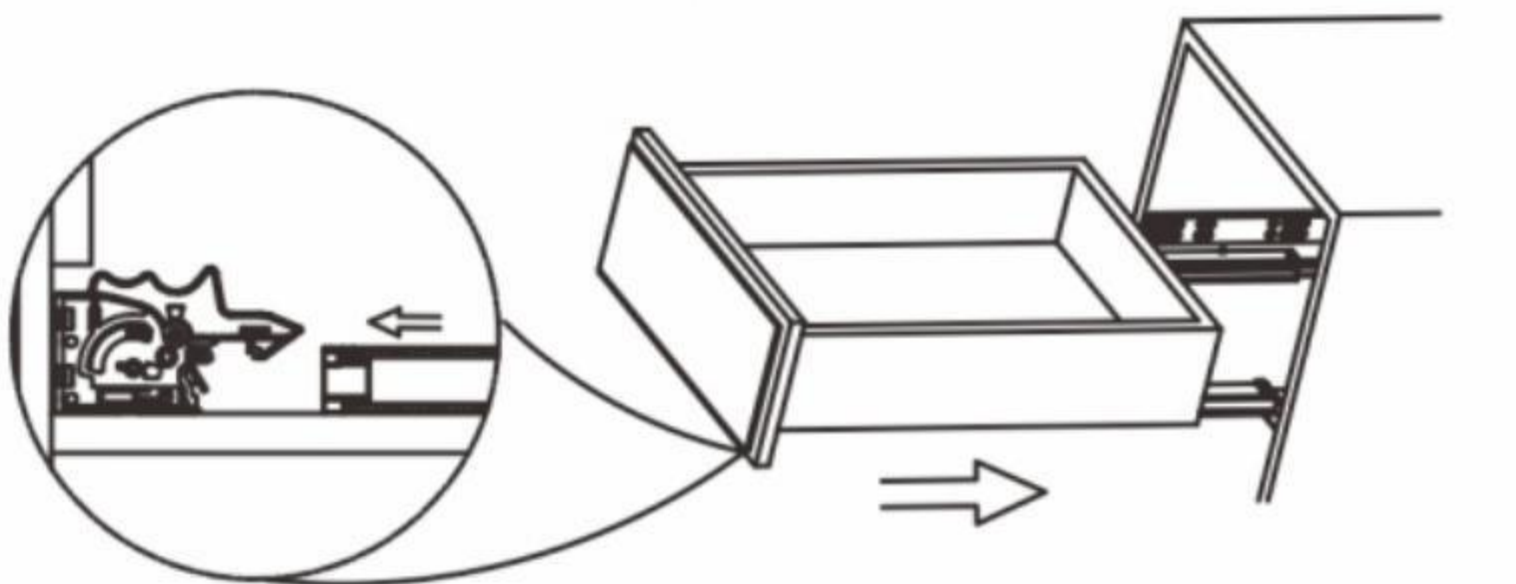

(3) 如需拆卸抽屉，请按图所示按住把手箭头的按键，然后将抽屉往外抽
Press the connecting link then you can take out the drawer.

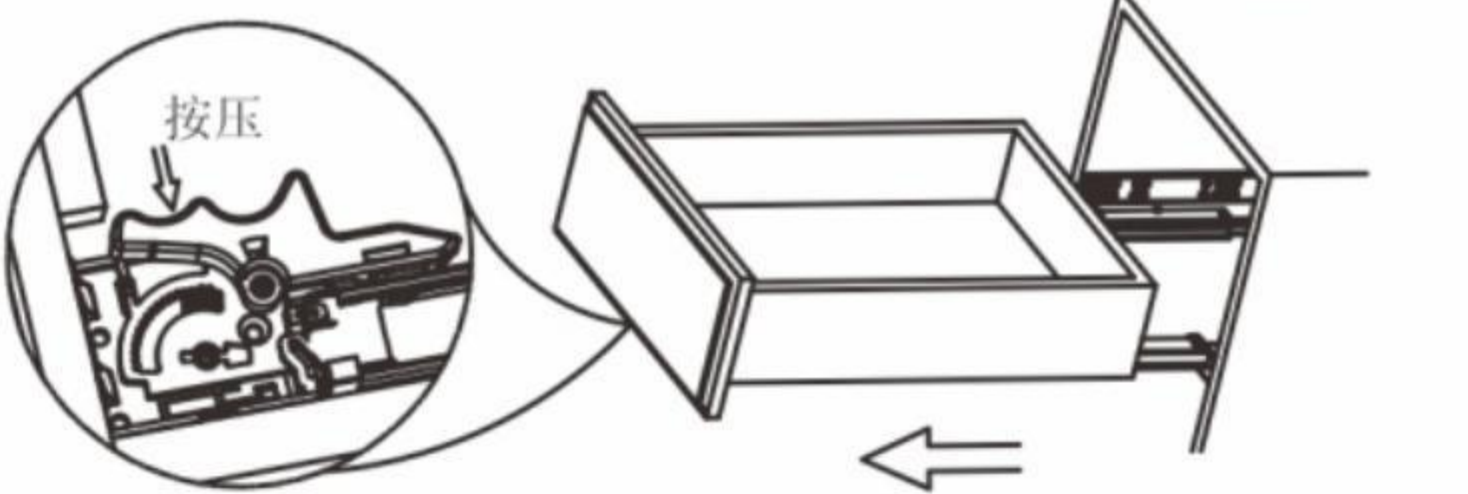

 平头螺丝 grub screw	 欧标螺丝 European standard screw	 P头螺丝 P head screw
---	--	---



抽屉内置安装
Inner drawer



抽屉外置安装
Standard drawer