


美式三节隐藏式缓冲滑轨带(前置连接件、尾托)
American style full extension soft closing undermount slide (with front connectors and back connectors)

US33B




可选配件 Optional Accessories

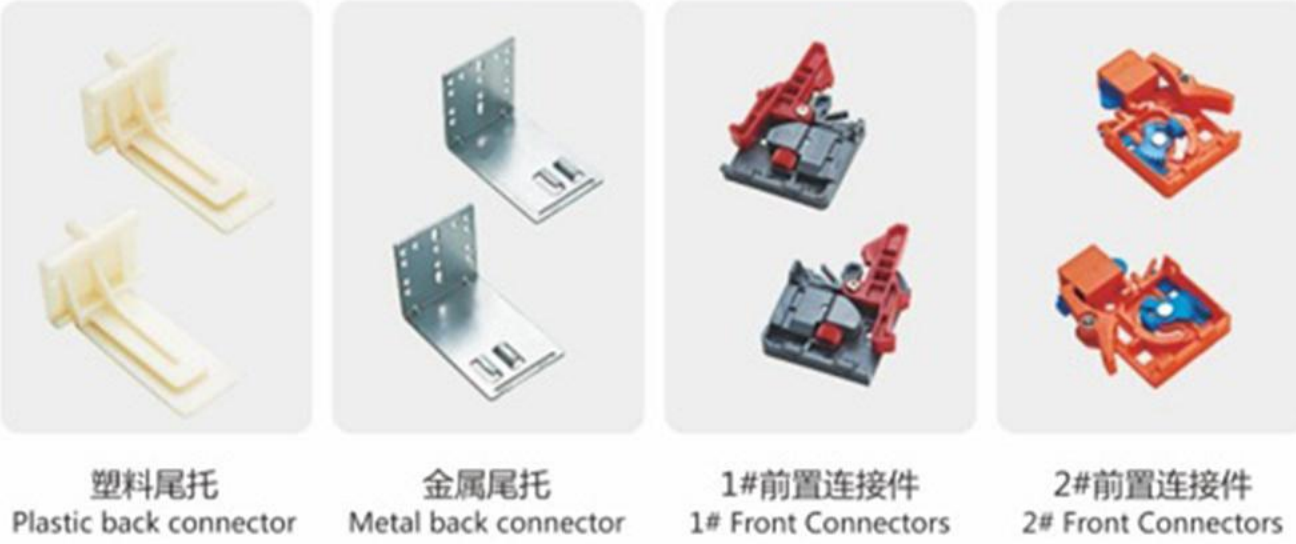

塑料尾托 Plastic back connector 金属尾托 Metal back connector 1#前置连接件 1# Front Connectors 2#前置连接件 2# Front Connectors

产品特点 Product features

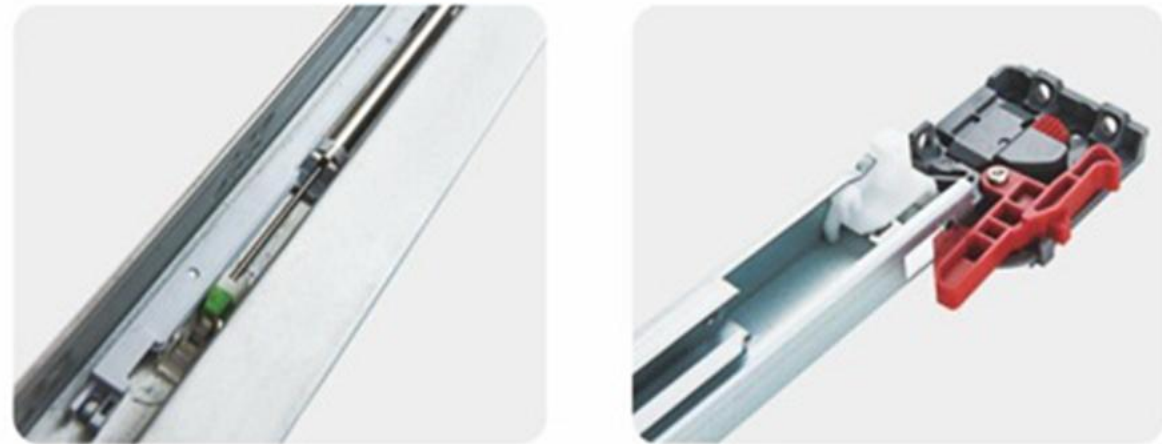

金属阻尼管 Metal damping tube 三维可调连接件 3D adjustment connector

产品规格 Product specifications

产品编号 Item No.	滑轨长度 Slide Length	抽屉长度 (L1) Drawer Length	拉出长度 Pull-out Length	最小柜深 (L) Min Cabinet Depth	包装单位 (套) / 箱 Packing Unit (set)/Box
US33B-12"/305	318mm	305mm	286mm	341mm ±8	10
US33B-15"/381	394mm	381mm	360mm	417mm ±8	10
US33B-18"/457	470mm	457mm	405mm	493mm ±8	10
US33B-21"/533	546mm	533mm	510mm	569mm ±8	10


基本参数 Basic Parameter

产品材质: 镀锌板
材料厚度: 1.8x1.5x1.0 mm
额定负重: 35KGS / 18" 标准长度
使用寿命: 超过50000次, 通过SGS疲劳测试
尺寸范围: 12" - 21", 也可根据要求定制
安装方式: 前置连接件连接
连接件调节幅度: 2.5mm (上下调节)
产品特点: 全新优化设计, 配备高精度的生产线和检测仪器
静音系统保证滑动导轨推拉轻松, 顺畅无噪声


Product material: Galvanized sheet
Material thickness: 1.8x1.5x1.0 mm
Load rating: 35KGS / 18" as standard
Cycling: over 50,000 times, pass the SGS fatigue test
Size range: 12" - 21", customized is available
Installation: Connect with front connector
The front connectors adjusting range: 2.5mm (up and down)
Product feature: Innovative new designed, produced by high accuracy production line and strict measuring.
Silent system guarantees smooth run without noise.

Installation- 安装详情

柜体内的空间需求
Dcabinet Inside Space

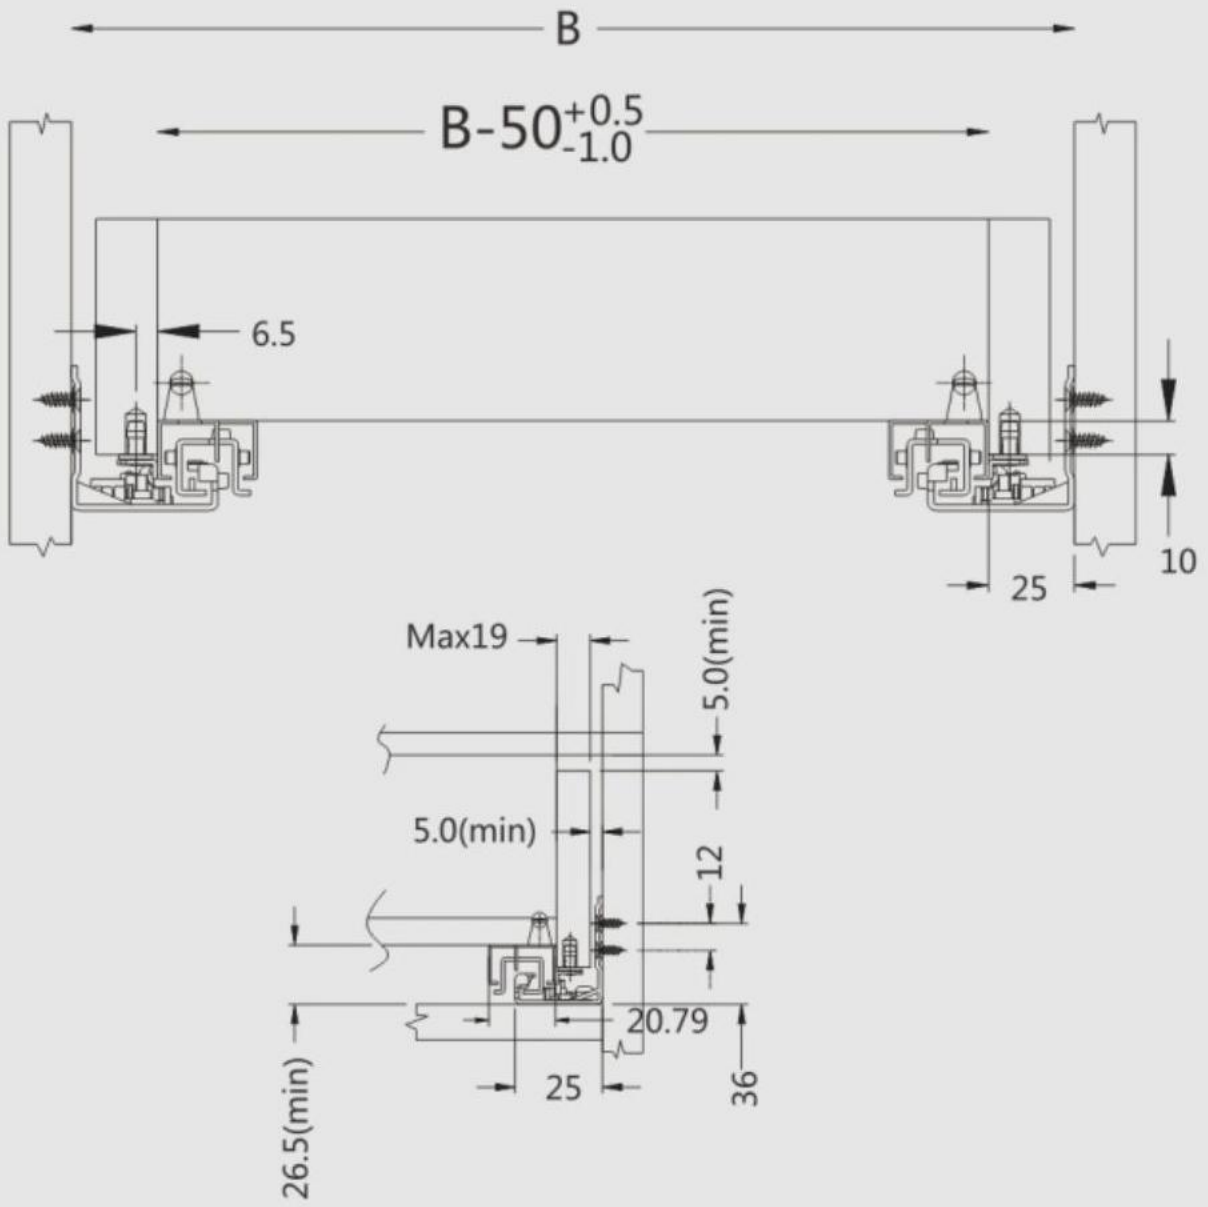

抽屉尺寸及打孔图
Drawer Size And Drilling Diagram

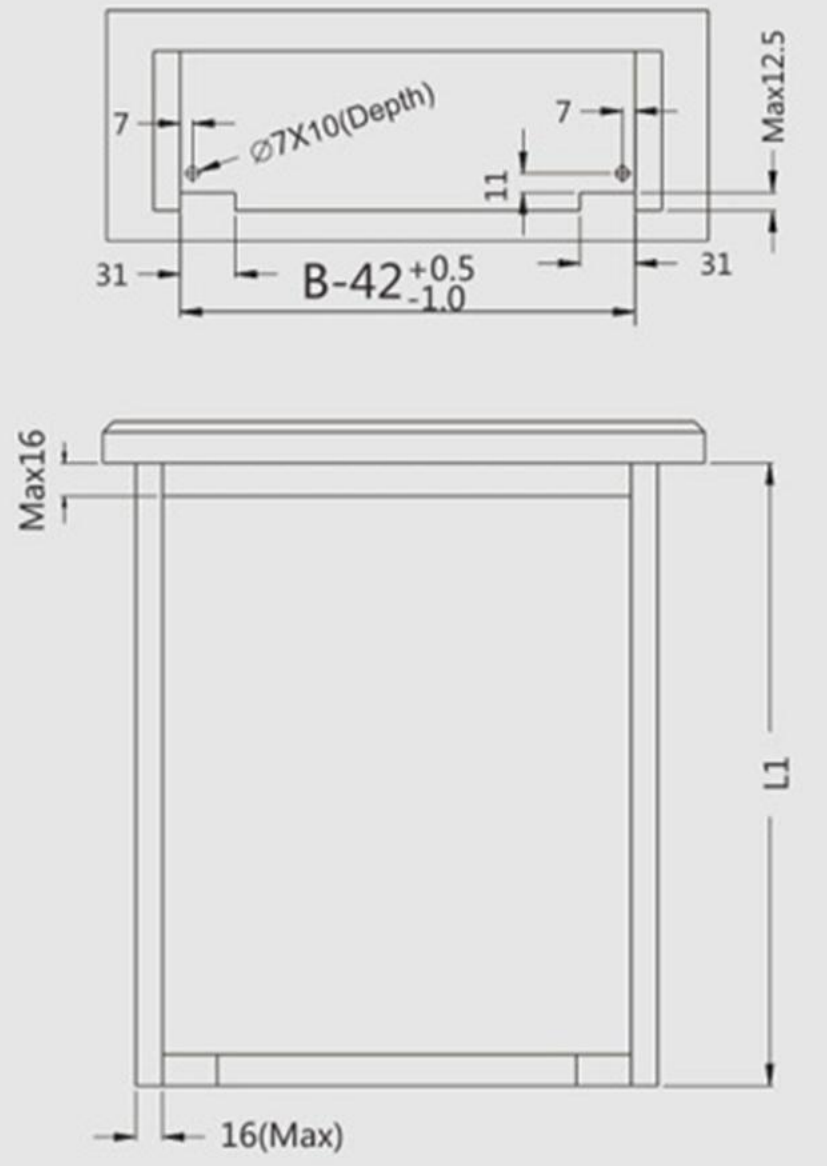

安装孔位图
Hole Pattern For Installation

