

卡式液压缓冲铰链
Cassette hydraulic buffering hinge


产品图示




产品描述

- 开启角度: 95°/105°
- 铰杯厚度: 11.5毫米
- 铰杯直径: 35毫米
- 面板(K)尺寸: 3-7毫米
- 门板可用厚度: 14-22毫米
- Opening angle: 95°/105°
- Thickness of hinge cup: 11.5mm
- Diameter of hinge cup: 35mm
- Panel (K) Size: 3-7mm
- Available door thickness: 14-22mm

φ35mm铰杯种类 (Hing cup types)

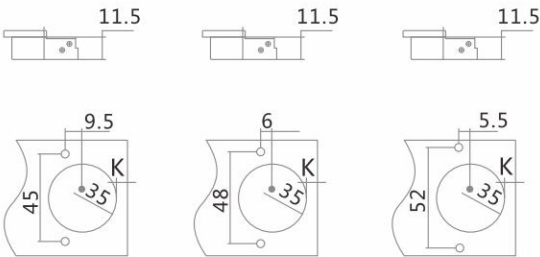


φ35mm铰杯可配螺丝种类 (Options of screws and dowels)

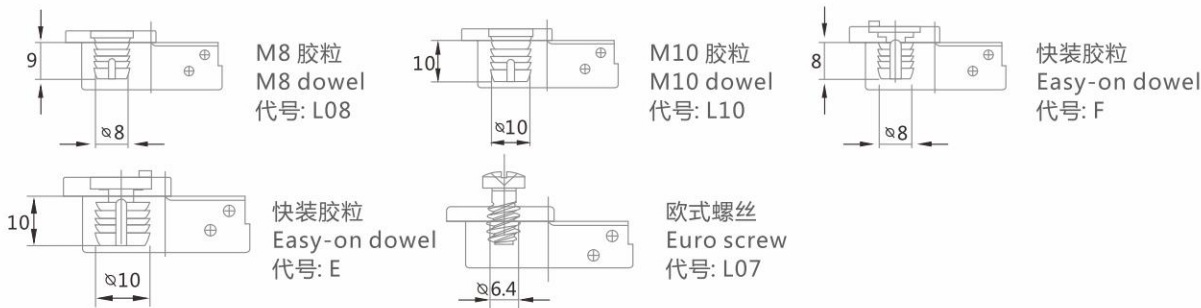

利用以下公式决定铰链的种类，解决问题时，必需有门身钻孔“K”及安装板高度“H”的数值。
Use the following formula to determine the type of hinges, solving problems, it is necessary a door body drillHole "K" and mounting plate height value of "H".



直臂 订货号 (Item number) : 1321

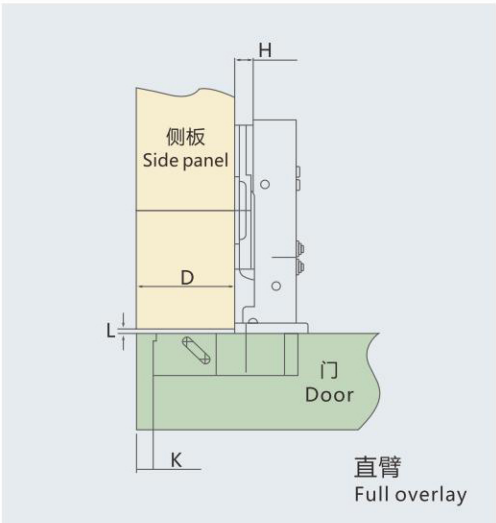


$H = 14 + K - D$

D \ K	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17



中弯 订货号 (Item number) : 1322

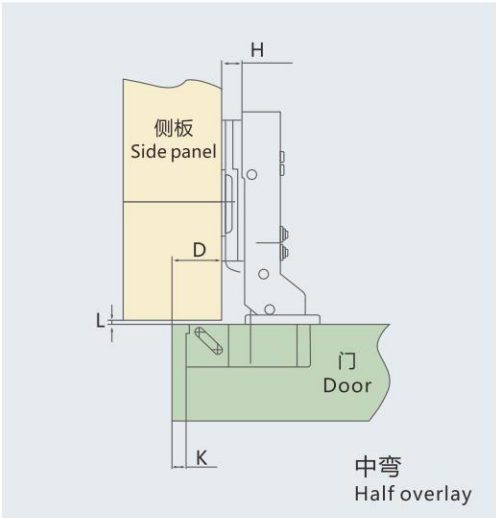


$H = 4 + K - D$

D \ K	3	4	5	6	7
0	7	8	9	10	11
2	5	6	7	8	9
4	3	4	5	6	7



大弯 订货号 (Item number) : 1323

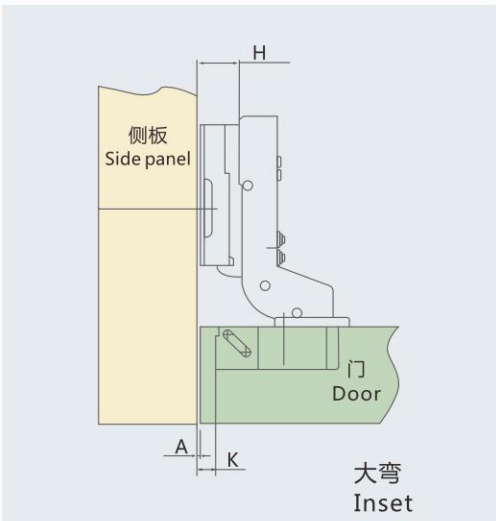

$H = 4 + K + A$

A \ K	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	-1	-2
4	5	4	3	2	1