

固定液压缓冲铰链
Fixed hydraulic buffering hinge


产品图示



产品描述


- 开启角度: 105度
- 铰杯厚度: 11.5毫米
- 铰杯直径: 35毫米
- 面板(K)尺寸: 3-7毫米
- 门板可用厚度: 14-22毫米
- Opening angle: 105°
- Thickness of hinge cup: 11.5mm
- Diameter of hinge cup: 35mm
- Panel (K) Size: 3-7mm
- Available door thickness: 14-22mm

φ35mm铰杯种类 (Hing cup types)

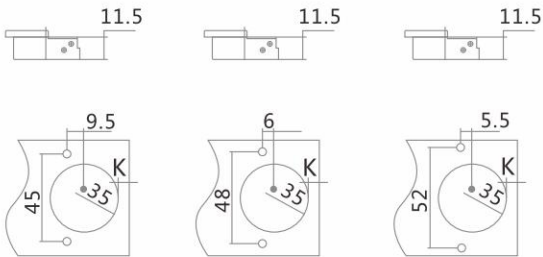


利用以下公式决定铰链的种类，解决问题时，必需有门身钻孔“K”及安装板高度“H”的数值。
Use the following formula to determine the type of hinges, solving problems, it is necessary a door body drillHole "K" and mounting plate height value of "H".

φ35mm铰杯可配螺丝种类 (Options of screws and dowels)

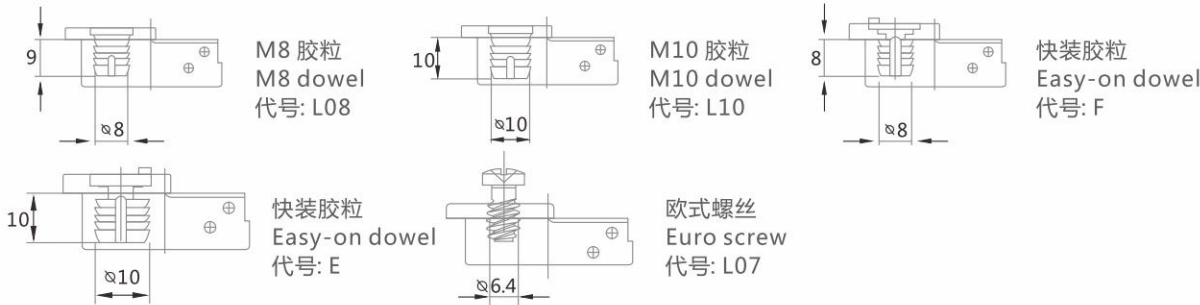

直臂 订货号 (Item number) : 1541

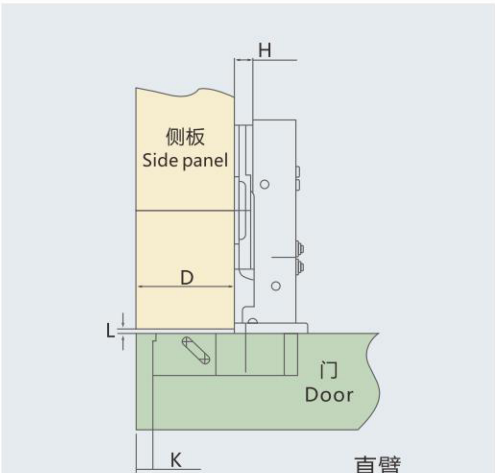


直臂
Full overlay

$H=14+K-D$

D\K	3	4	5	6	7	
H	0	17	18	19	20	21



中弯 订货号 (Item number) : 1542

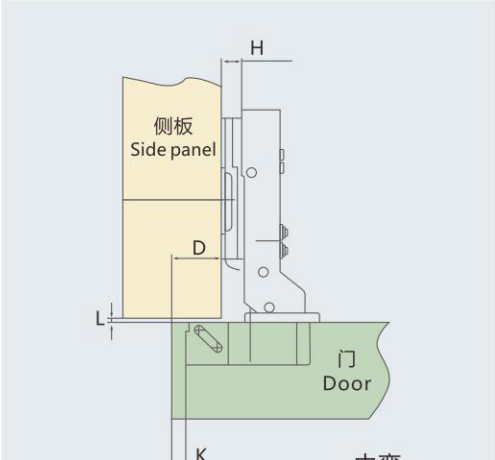


中弯
Half overlay

$H=4+K-D$

D\K	3	4	5	6	7	
H	0	7	8	9	10	11



大弯 订货号 (Item number) : 1543

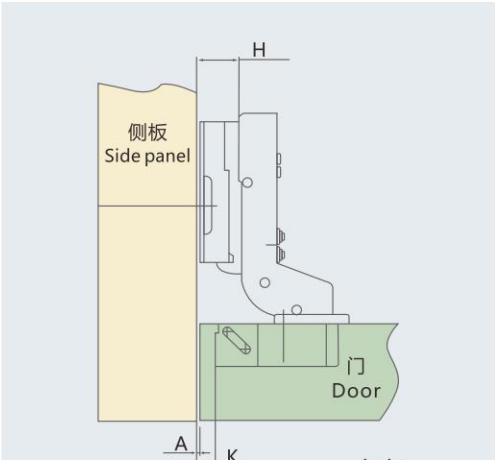

大弯
Inset

$H=4+K+A$

A\K	3	4	5	6	7	
H	0	1	0	-1	-2	-3