

40mm杯卡式液压铰链

Cassette hydraulic hinge cup 40mm


产品图示



产品描述


- 开启角度: 95度
- 铰杯厚度: 13.5毫米
- 铰杯直径: 40毫米
- 面板(K)尺寸: 3-15毫米
- 门板可用厚度: 18-30毫米
- Opening angle: 95°
- Thickness of hinge cup: 13.5mm
- Diameter of hinge cup: 40mm
- Panel (K) Size: 3-15mm
- Available door thickness: 18-30mm

φ40mm铰杯种类 (Hing cup types)

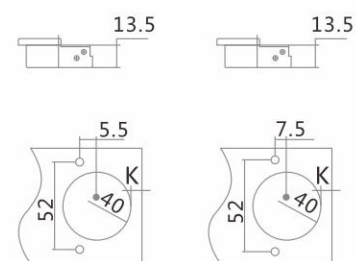


利用以下公式决定铰链的种类，解决问题时，必需有门身钻孔“K”及安装板高度“H”的数值。
Use the following formula to determine the type of hinges, solving problems, it is necessary a door body drillHole "K" and mounting plate height value of "H".

φ40mm铰杯可配螺丝种类 (Options of screws and dowels)

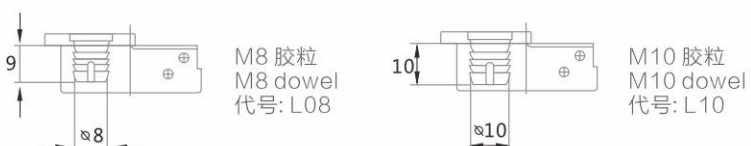


直臂 订货号 (Item number) : 1841

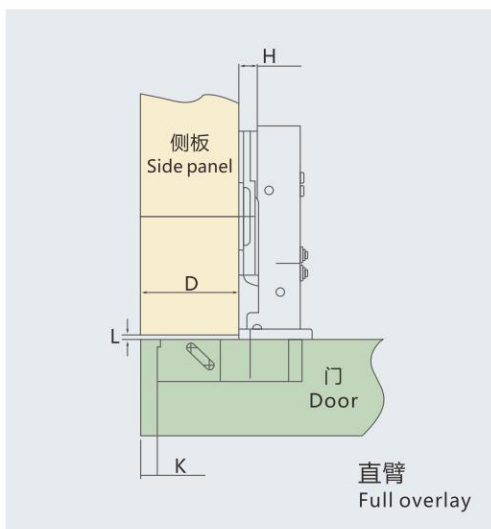

$H = 18 + K - D$

D \ K	3	4	5	6	7	...MAX=15
0	21	22	23	24	25	
0	19	20	21	22	23	
0	17	18	19	20	21	


中弯 订货号 (Item number) : 1842

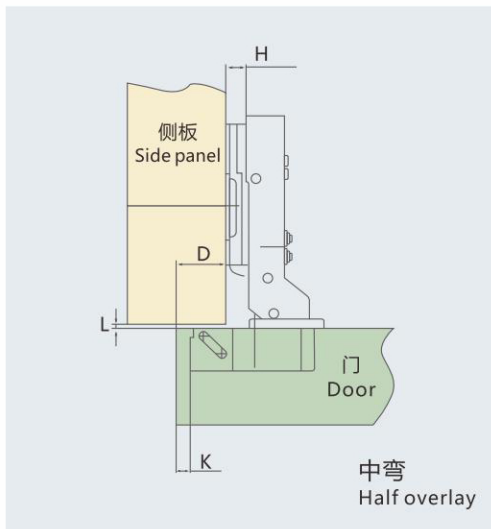

$H = 10 + K - D$

D \ K	3	4	5	6	7	...MAX=15
0	13	14	15	16	17	
0	11	12	13	14	15	
0	9	10	11	12	13	

大弯 订货号 (Item number) : 1843

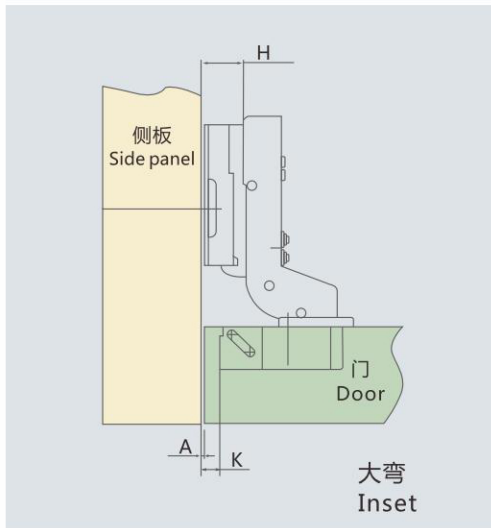

$H = 4 + K + A$

D \ K	3	4	5	6	7	...MAX=15
0	1	0	-1	-2	-3	
0	3	2	1	0	-1	
0	5	4	3	2	1	