

欧式三节隐藏式缓冲滑轨（带前置连接件）  
European style full extension soft closing undermount slide with front connectors



可选配件 Optional Accessories

基本参数 Basic Parameter



1#塑料前置连接件




2#塑料前置连接件


产品材质：镀锌板  
材料厚度：1.8x1.5x1.0 mm  
额定负重：35KGS / 18" 标准长度  
使用寿命：超过50000次，通过SGS疲劳测试  
尺寸范围：12" - 22"，也可根据要求定制  
安装方式：前置连接件连接  
连接件调节幅度：2.5mm（上下调节）  
产品特点：全新优化设计，配备高精度的生产线和检测仪器  
静音系统保证滑动导轨推拉轻松，顺畅无噪声

Product material: Galvanized sheet  
Material thickness: 1.8x1.5x1.0 mm  
Load rating: 35KGS / 18" as standard  
Cycling: over 50,000 times, pass the SGS fatigue test  
Size range: 12" - 22", customized is available  
Installation: Connect with front connectors  
The front connectors adjusting range: 2.5mm ( up and down )  
Product feature: Innovative new designed , produced by high accuracy production line and strict measuring, silent system guarantees smooth run without noise.

产品特点 Product features

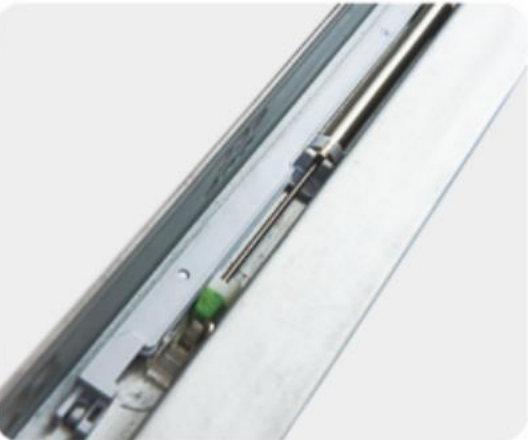

金属阻尼管  
Metal damping tube

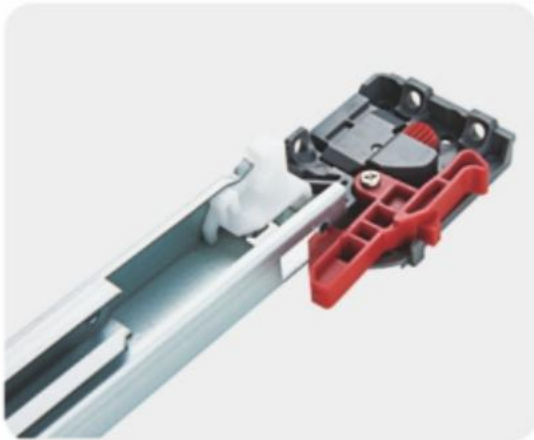

三维可调连接件  
3D adjustment connector

产品规格 Product specifications

| 产品编号<br>Item No | 滑轨长度<br>Slide Length | 抽屉长度 ( L1 )<br>Drawer Length | 最小柜深 ( L )<br>Min Cabinet Depth | 拉出长度<br>Pull-out Length | 包装单位 ( 套/箱 )<br>Packing Unit ( set/box ) |
|-----------------|----------------------|------------------------------|---------------------------------|-------------------------|------------------------------------------|
| EUR33B-12"/300  | 308mm                | 300mm                        | 322mm                           | 295mm                   | 10                                       |
| EUR33B-14"/350  | 358mm                | 350mm                        | 372mm                           | 335mm                   | 10                                       |
| EUR33B-16"/400  | 408mm                | 400mm                        | 422mm                           | 385mm                   | 10                                       |
| EUR33B-18"/450  | 458mm                | 450mm                        | 472mm                           | 435mm                   | 10                                       |
| EUR33B-20"/500  | 508mm                | 500mm                        | 522mm                           | 485mm                   | 10                                       |
| EUR33B-22"/550  | 558mm                | 550mm                        | 572mm                           | 535mm                   | 10                                       |

Installation- 安装详情

柜体内的空间需求  
Dcabinet Inside Space

抽屉尺寸及打孔图  
Drawer Size And Drilling Diagram

安装孔位图  
Hole Pattern For Installation

外置抽屉  
Standard drawer

内置抽屉  
Inner drawer

将左右把手安装抽屉底部  
Assemble the handle on she bottom cabinet